


CORNER RESTORATION

NW cor.
CORNER Sec. 30 TWP 13 S RANGE 35 E

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

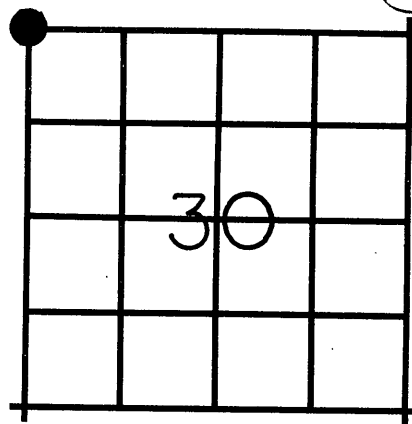

ORIGINAL DESCRIPTION:

South on West boundary of Sec. 19

80 chs. set stone 15x10x6 for corner to Secs.
24, 25, 19 and 30.

RECEIVED AND
FILED

APR 30 1987

OFFICE OF COUNTY SURVEYOR
Attest: *Michael A. Perry*

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
M. W. Perry

April 22, 1987

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Grant County Surveyor

EVIDENCE FOUND: I found the original corner stone, a basalt stone 15x10x5 inches, marked with three distinct notches and one dim notch on one edge and two notches on opposite edge. Corner stone was on South edge of a mound of stone, 4 ft. base and 1 ft. high. I accept the position of this stone for the section corner.


DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of the corner stone, I set a 1½"x30" galvanized iron pipe, 8 inches in the ground to bedrock, and surrounded pipe with a mound of stone, 4 ft. base to top of cap. from which I scribe NEW BEARING TREES:

- A juniper 14 ins. diam. bears N. 10° E., 9.3 ft., mkd. T13S R35 E S19 CSBT.
- A juniper 12 ins. diam. bears S. 75° E., 60.3 ft., mkd. T13S R35E S30 CSBT.
- A juniper 7 ins. diam. bears S. 17° W., 79.7 ft., mkd. T13S R34E S25 CSBT.
- A pine, 18 ins. diam. bears N. 72° W., 120.8 ft., mkd. T13S R34E S24 CSBT.

MONUMENT MARKED

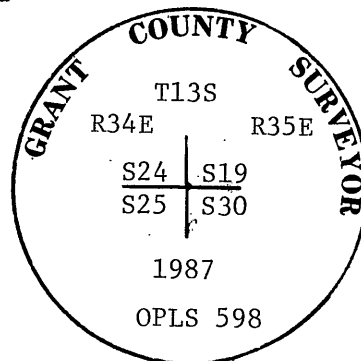

Buried original corner stone SW and alongside iron pipe.
Used magnetic compass with 20° East variation and steel tape, measuring distances to a 40d nail driven into side center of BTs. Attached County Surveyor BT tags to BTs and painted BT blazes with red timber marking paint.