


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

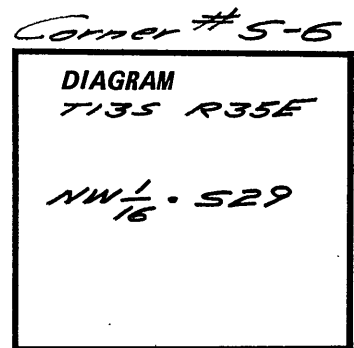

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum pipe with 3" aluminum cap rising 10" in stone mound.

Cap marked

As witnesses:

A 10" Lodgepole Pine brs. S44°E 13.3' marked NW 1/16 S29 BT.

NW 1/16 S29

A 9" Fir brs. S21°W 19.8' marked NW 1/16 S29 BT.

1986

LS 1020

I hereby certify the above corner point was established as described in June, 1986, U.S.F.S. bearing tree signs were placed on all BTs and a 6" red band was painted around each BT.

Office of.....*Surveyor*..... County of.....*G.R.A.P.T.*.....

State of.....*OREGON*....., I hereby certify that the within instrument was filed in this office for record on the.....*3*..... day of.....*Sept*....., 19*86*

.....*Robert D. Gaget*..... by.....*George W. Colvin, Jr.*.....
(COUNTY OFFICIAL) (DEPUTY)

