


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

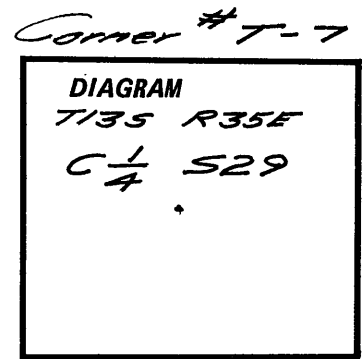

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum pipe with 3" aluminum cap
rising 24" in stone mound.

New BTs:

A 11" Fir brs. S64°E 15.1'
marked C 1/4 S29 BT.

A 6" Ponderosa Pine brs. N18°E 40.1'
marked C 1/4 S29 BT.

Cap marked

T135 R35E

C $\frac{1}{4}$ S29

1986

LS1020

I hereby certify the above corner point was established as described in June, 1986, U.S.F.S. bearing tree signs were placed on all BTs and a 6" red band was painted around each BT.



Office of... SURVEYOR... County of... CLATSOP...

State of... OREGON... I hereby certify that the within instrument was filed in this office

for record on the 3 day of Sept, 1986

Robert D. Baggett by (COUNTY OFFICIAL)

(DEPUTY)

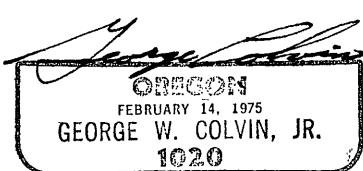

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

SEE MAP OF SURVEY NO. 951

T-7