


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established in 1881
by Robb & Graden:
Set basalt stone 14x12x7 in mound of
stone from which
A 10" Tamarack brs. N8°W 14 1/2' (9.2')

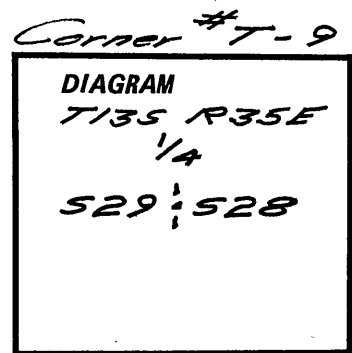

Description of corner evidence found:

Found 12"x10"x7" stone marked 1/4 on down face in
center of stone mound.

Dead, down and decomposed tree Northwest with
BT brand marked "1/4 S BT" in debris. Held stone
as corner position.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum pipe with 3" aluminum cap
rising 10" in stone mound. Buried original stone
alongside. Cap marked

New BTs:
A 8" Fir brs. S17°E 17.1'
marked 1/4 S28 BT.
A 6" Fir brs. S86°W 9.6'
marked 1/4 S29 BT.

T135 R35E
1/4
529 | 528
1986
LS 1020

I hereby certify the above corner point was
perpetuated as described in June, 1986. U.S.F.S.
bearing tree signs were placed on all BTs and
a 6" red band was painted around each BT.

Office of SURVEYOR County of CARROLL
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 3 day of Sept, 1986
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

