


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established in 1881
by Robb & Graden:
Set basalt stone 20x12x7 in mound
of stone from which
A 32" Pine brs, N 30° E 48.1x5 (31.7')

Corner # X-5

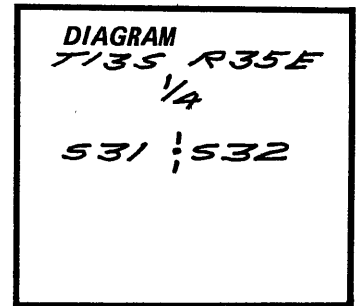

Description of corner evidence found:

Found 21"x14"x6" stone, marked 1/4 on South face,
in stone mound.

Large Pine snag, dead & down, Northeast. Held
stone as corner position.

Description of monument and accessories I established to perpetuate the
original location of this corner:

Set 2 1/2"x30" aluminum pipe with 3" aluminum cap
rising 5" in stone mound. Buried original stone
alongside.

Cap marked

New BTs:

A 9" Ponderosa Pine brs, N 45° W 6.9'
marked 1/4 531 BT.
A 12" Juniper brs, N 80° E 29.7'
marked 1/4 532 BT.

T135 R35E
1/4
531 | 532
1986
LS1020

I hereby certify the above corner point was
perpetuated as described in June, 1986, U.S.F.S.
bearing tree signs were placed on all BTs and
a 6" red band was painted around each BT.

Office of..... Surveyor..... County of..... GRANT.....

State of..... OREGON....., I hereby certify that the within instrument was filed in this office

for record on the..... 3..... day of..... Sept....., 1986

..... Robert D. Baggett..... by.....

(COUNTY OFFICIAL)

(DEPUTY)

