CORNER RESTORATION

CORNER: SE SEC. 1, TWP. 13 S., RANGE 26 E., W.M.

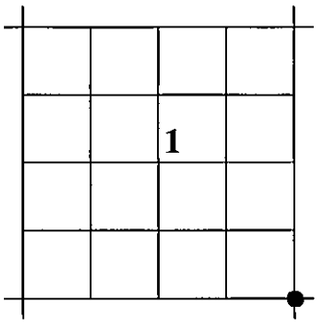

ORIGINAL SURVEY BY: W.H. Byars

CONTRACT NUMBER: 185

CONTRACT DATE: May 7, 1873

SUBSEQUENT SURVEYS:
- By Vernon Glaze, Grant County Surveyor in 1914
- Robert D. Bagett, Grant County Surveyor in 1996

ORIGINAL GLO DESCRIPTION: *Set corner to Secs. 1, 6, 7 & 12. A stone 14x8x8*
- 1914 DESCRIPTION: During the course of survey No. 7G, the corner was remonumented by Vernon Glaze with a brass cap. His record states: *Common Gov. cor. sec. 12-7-13-18* (typographical error, should read 12-7-1-6) *T13 R26-27E set iron post with brass cap marked wooden post 4x4x4.0 Scribed erected monument of Stone.*
- 1996 DESCRIPTION: Bagett's record states: *Found a ½"x24" iron pipe 8" below ground level, which was shown to me by local resident M.D. Curry in 1969. . . We also found the 1½"x 24" iron pipe set in 1914 by County Surveyor Vernon Glaze. . . This pipe is bent and along side the ½ inch iron pipe, the ½" pipe was set vertically above the bottom of Glaze's bent and leaning monument. I accept the ½" iron pipe as the true corner position. . . . At the corner point: I set a 1½"x30" galv. iron pipe, 38" in the ground, on the east shoulder of the South Fork County Road with attached Grant County Surveyor brass cap marked as shown. From which I set new reference points: A 5/8"x30" iron pin, bears N30°E, 29.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP1 1996 OPLS 598. A 5/8"x30" iron pin, bears S45°W, 61.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP2 1996 OPLS 598. A 5/8"x30" iron pin, bears N45°W, 63.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP3 1996 OPLS 598. Also I designate new reference points: A 5/8"x30" iron pin, bears N89°50'E, 15.04 ft., Set in Record Map of Survey No. 314, A 5/8"x30" iron pin, bears S10°48'E, 81.60 ft., Set in Record Map of Survey No. 314.*

EVIDENCE FOUND AND NEW ACCESSORIES: Found the monument set by Bagett in 1996 in good condition. Found all references in good condition as well. Placed an 8"cast iron monument box flush with the ground over the brass cap.

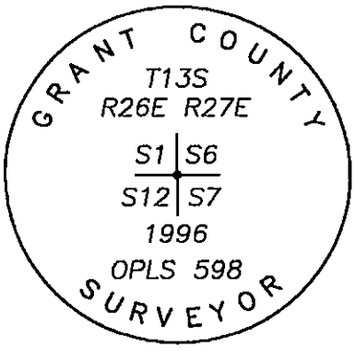

STATE PLANE COORDINATES (3601 OR N)
Reference Datum: NAD83 From OPUS solution

Northing: 291,354.5 ft.
Easting: 8,454,985.6 ft.
Ellip. Ht: 2,346.5 ft.

RESTORATION BY, STAMP AND DATE:
Michael C. Springer, PLS, Grant County Surveyor
Jason L. Hatfield, PLS, Deputy County Surveyor

Surveyed October 18, 2012

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

OCT 24 2012

BY: _____

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2014