CORNER RESTORATION

CORNER: NE SEC. 15, TWP. 13 S. RANGE 26 E.

ORIGINAL SURVEY BY: Jason Owen

CONTRACT NUMBER: 194

CONTRACT DATE: July 1, 1873

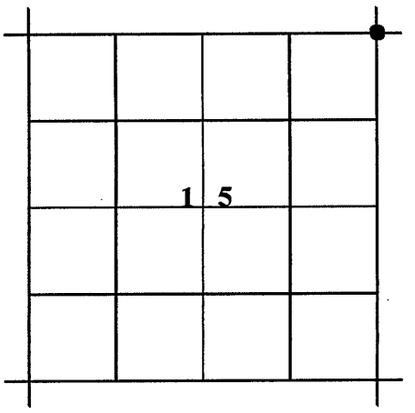

ORIGINAL DESCRIPTION: Set Stone 20x18x6 for cor to Secs 10, 11, 14 & 15

RESTORATION BY, STAMP AND DATE:

M.C. Springer
R.D. Bagett
J.L. Hatfield

RECEIVED AND FILED

June 16, 2003
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: Jason L. Hatfield

REGISTERED PROFESSIONAL LAND SURVEYOR
Michael C. Springer
OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918
EXPIRES: 6/30/2004

June 13, 2003

Deputy Grant
County Surveyor

EVIDENCE FOUND: Found basalt stone, 20x18x6, marked with 4 grooves on one face and no other remaining marks, lying flat, surrounded by a mound of stone. I accept the marked stone for the position of the section corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:
A double trunk juniper, 24" diam., bears N47°E, 76.6 ft. marked T13S R26E S11 CSBT
A Juniper, 13" diam., bears S36°E, 25.4 ft. marked T13S R26E S14 CSBT
A Juniper, 5" diam., bears S44°W, 89.0 ft. marked X CSBT
A Juniper, 14" diam., bears N65°W, 88.0 ft. marked T13S R26E S10 CSBT

GRANT COUNTY
T13S R26E
S10 | S11
S15 | S14
2003
OPLS 70918
SURVEYOR

Buried original corner stone, inverted, north and along side new monument. Raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 17° E. var. and steel tape, measuring to a 50d nail driven in the side-center at the root crown of the BT's. Attached BT tags to BT's.