CORNER RESTORATION

CORNER: C1/4 COR. SEC. 24, TWP. 13 S., RANGE 26 E., W.M.

ORIGINAL SURVEY BY: NOT

CONTRACT NUMBER: PREVIOUSLY

CONTRACT DATE: ESTABLISHED

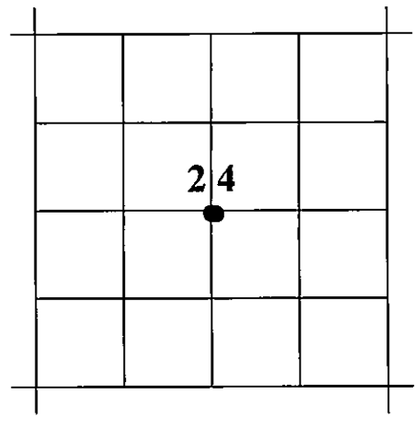

ORIGINAL DESCRIPTION: None

RESTORATION BY, STAMP AND DATE:
Michael C. Springer, PLS

RECEIVED AND FILED

June 30, 2010

OFFICE OF COUNTY SURVEYOR

ATTEST:

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2012

June 24, 2010 **SEE RECORD SURVEY NO. 1893**

EVIDENCE FOUND: Corner not previously established

AT THE CORNER POINT: Set a 5/8"x30" iron pin with attached 2" aluminum cap 29" in the ground. Built a 2 foot mound of stone. Cap is marked as shown below.

FROM WHICH I MARK THE FOLLOWING BEARING TREES:
A juniper 12½ inch diam. bears S.53°W., 40.1 feet, marked "S24 BT"
A juniper 7 inch diam. bears N.18°W., 48.1 feet, marked "S24 BT"
Attached BT tags to all bearing trees

ALSO FROM WHICH I SET THE FOLLOWING REFERENCE POINTS:
A 5/8"x30" iron pin bears N.74°59'E., 28.65 feet. with attached 1½" aluminum cap marked "BMLS SURVEY MARKER RP1 2010"
A 5/8"x30" iron pin bears S.24°30'E., 21.10 feet. with attached 1½" aluminum cap marked "BMLS SURVEY MARKER RP2 2010"

Used magnetic compass with 17° East variation and a steel tape to measure to a 60d nail driven in the side center of the root crown of the BT's and RTK GPS to measure to the reference points.

BENCHMARK
T13S R26E
C1/4 S24
2010
LS70918
LAND SURVEYING

STATE PLANE COORDINATES: (3601 OR N)
Reference Datum: NAD83
Northing: 278,090.0 ft.
Easting: 8,452,422.1 ft.
Ellip Ht: 2,469.7 ft.