CORNER RESTORATION

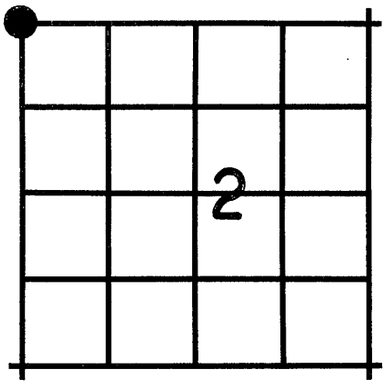

NW COR.
CORNER Sec.2 **TWP** 13 S. **RANGE** 33 E.

ORIGINAL SURVEY BY: J.B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June, 1869

ORIGINAL DESCRIPTION: Set stone 18"x10"x8" for corner to secs. 34 & 35.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
S.D. Follweiler
N.I. Fowle

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

June 12, 1992 Grant County Surveyor

EVIDENCE FOUND: Found a Basalt stone 14'x8"x7", marked 6 grooves South; 3 grooves East; and 3 grooves West. This stone is harmoniously related to other known corners in the area.
I accept this stone for the position of the section corner.

RECEIVED AND FILED
JUL 15 1992
OFFICE OF COUNTY SURVEYOR
Attest: Robert D. Bagett

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point:I set a 1½"x30" Galv. iron pipe, 20" in the ground, with attached Grant County Surveyor Brass Cap marked as shown.
From which I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 22.0 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1992. (In East-West fence line.)
A 5/8"x30" iron pin, bears S45°E, 25.0 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1992.
A 5/8"x30" iron pin, bears S45°W 25.0 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1992.
A 5/8"x30" iron pin, bears N45°W, 25.0 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1992. (In East-West fence line.)

MONUMENT MARKED

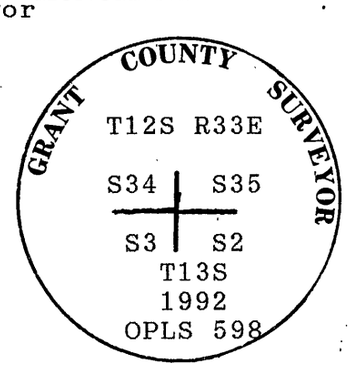

Buried marked stone North and alongside iron pipe,raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.

A-17