CORNER RESTORATION

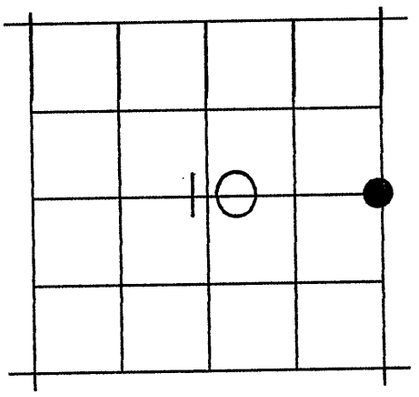

CORNER: E¼ **Sec:10 TWP:** 13S. **RANGE:**33E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869
This corner was subsequently re-established on Mar. 17, 1969 by D.I. Griffith, Co. Surveyor. See corner restoration records.

ORIGINAL DESCRIPTION: GLO:Set stone 15x9x7 for ¼ sec. cor.
Griffith's record:
Set 2"x30" iron pipe 18" in the ground, surround pipe with a mound of stone.

Brass Cap Monument Stamped:

T13SR33E
¼
S10 | S11
1969
PLS644
GRANT COUNTY
SURVEYOR

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
N.I. Fowle

RECEIVED AND FILED
SEP 2 4 1993
OFFICE OF COUNTY SURVEYOR
Attest:

Renewal Date 12-31-94
REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

September 21, 1993

Grant County Surveyor

EVIDENCE FOUND:
The iron pipe monument set by Griffith in 1969 remained in position for about 20 years. I have tied that monument several times through the years in the performance of private surveys in this area. About four years ago the power company installed a support post at the powerpole near the monument. It is my belief that the corner monument was removed at that time, as we found it lying on the ground. I reported this on Map of Survey No. 1135.
To perpetuate this position I set a new monument at the same point monumented by the Grant County Surveyor in 1969. This known position is re-established from local control and at the established bearing and distance from the centerline street monuments found at 12th and Metschan and at 12th and Overholt, as shown on Map of Survey No. 1135.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point:I set a 1½"x30" Galv. iron pipe, 30" in the ground, with attached Grant County Surveyor Brass Cap marked as shown.

From which I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears S.42°52'E.,31.59 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP NO.1 1993.
A 5/8"x30" iron pin, bears N.29°41'E.,24.86 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP NO.2 1993.
A 5/8"x30" iron pin, bears S.29°41'W.,34.40 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP NO.3 1993.
A 5/8"x30" iron pin, bears N.42°52'W, 25.70 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP NO.4 1993.

MONUMENT MARKED
GRANT COUNTY SURVEYOR
T13S R33E
¼
S10 | S11
1993
OPLS 598

Surround iron pipe with stone from base to top of cap. Bearings are based on Map of Survey No. 1135, bearings and distances measured with Wild TC1600 Total Station.