CORNER RESTORATION

CORNER: S1/4 SEC. 11, TWP. 13 S., RANGE 33 E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

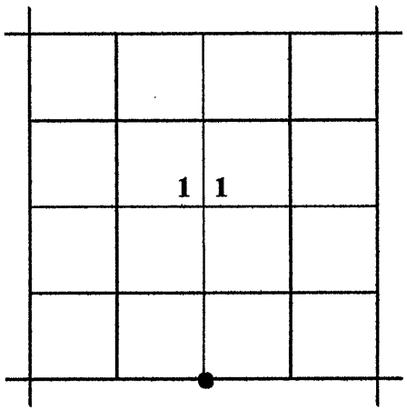

Subsequently remonumented by Robert D. Bagett, Grant County Surveyor, in October 1976. See Record Map of Survey No. 422

ORIGINAL DESCRIPTION: Set Stone 14x9x6 for 1/4 Sec corner.

In 1976 I set this corner at record position determined from Prairie City Land Company's First Addition Plat.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
M.C. Springer

RECEIVED AND FILED

DEC. 8, 2003
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: Michael C. Springer

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
Renewal Date 12/31/03

December 5, 2003 Grant County Surveyor

EVIDENCE FOUND: Found a 1½" galv. iron pipe with attached 2½" Grant County Surveyor brass cap marked as shown below.
Corner is 6 ft. East of a north-south wire fence.

See Record Map of Survey No. 422

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings including compass var.

The monument set in 1976 is in good condition.

From which I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N50°E, 45.27 ft., with attached 1½" alum. cap marked GRANT COUNTY SURVEYOR RP 1 2003 OPLS 598
A 5/8"x30" iron pin, bears S62°E, 35.57 ft., with attached 1½" alum. cap marked GRANT COUNTY SURVEYOR RP 2 2003 OPLS 598
A 5/8"x30" iron pin, bears S50°W, 42.30 ft., with attached 1½" alum. cap marked GRANT COUNTY SURVEYOR RP 3 2003 OPLS 598
A 5/8"x30" iron pin, bears N62°W, 35.40 ft., with attached 1½" alum. cap marked GRANT COUNTY SURVEYOR RP 4 2003 OPLS 598

GRANT COUNTY
T13S R33E
S11
1/4
S14
1976
OPLS 598
SURVEYOR

Used RTK GPS and true bearings to measure to reference points.