

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History Of Original Corner Establishment

Original corner established by Mark A. Fullerton, Deputy Surveyor, under General Land Office contract NO. 395 dated May 25, 1881.

Surveyor General's records state:

North on range line West boundary of section 18


80.00: Set Basalt stone 22x16x10 cor to secs 7,18,12&13

from which a Pine 18 ins. dia. bears North 18° West 33 lks.

a Pine 36 ins. dia. bears North 50° East 27 lks.

a Pine 10 ins. dia. bears South 47° East 113 lks.

a Juniper 12 ins. dia. bears South 60° West 112 lks.



Certified Record of Land Corner Monumentation Form by David B. Armstrong states: found the original bearing trees: a 42" dbh Ponderosa Pine with open face scribing visible but not legible bears North 33° East, 18.0 ft.; a 21" dbh Ponderosa Pine with open face visible scribing with open face visible scribing T14SR26S18BT bears South 52° East, 75.7 ft.; a 27" dbh Juniper with open face visible scribing T14SR26S13BT bears South 31 1/2° West, 73.7 ft.; a 23" dbh Ponderosa Pine with open face visible scribing T14SR2S12BT bears North 55° West, 21.9 ft.. Juniper should have been scribed 25 not 26 as found. corner monument was not found and corner area has been disturbed by tractor logging. At mean location of intersection of record distance from the original bearing trees, set 30 inch long 2 inch I.D. aluminum pipe 10 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown. From which the original bearing trees: a 42" dbh Ponderosa Pine bears North 33° East, 18.0 ft. with open face scribing visible but not legible; a 21" dbh Ponderosa Pine bears South 52° East, 75.7 ft with open face visible scribing with open face visible scribing T14SR26S13BT; a 27" dbh Juniper bears South 31 1/2° West, 73.7 ft with open face visible scribing with open face visible scribing T14SR26S13BT; a 23" dbh Ponderosa Pine bears North 55° West, 21.9 ft with open face visible scribing with open face visible scribing T14SR25S12BT. Raised a mound of stones 3 1/4 foot based to top of cap. Set steel post with 54-4 feet north of and facing cap.

Description of corner evidence

At assumed corner location found 3-1/4 inch aluminum cap up 2 inches in 3 feet in diameter stone mound. Cap stamped as shown.

Corner Monumentation

At position of found 3-1/4 inch aluminum cap, steel t-post 5 feet north of cap and attached a 54-9 sign.

Found Bearing Trees

A 44" Ponderosa Pine dead and standing with burned open face", bears N33°E, 18.0 FT.; A 21" Ponderosa Pine with with burned open face, bears S52°E, 75.7 FT.; A 28" Juniper with visible scribing "T14SR6ES13BT" bears S31°W, 73.7 FT.; A 25" Ponderosa Pine with burned open face, bears N55°W, 21.9 FT.

New Bearing Tree

A 20" Ponderosa Pine bears N68°E, 63.3 ft., scribed T14SR26ES7BT.

Nailed tack with brass washer stamped - LS53270- to face of new bearing trees. Nailed Bearing Tree signs (54-3) and Land Survey Monument signs (54-9) to all bearing trees. Painted 6 inch wide red band 6 feet above ground and faces of bearing trees red. Bearings by staff compass, declination 18° East. Distances to all bearing trees are measured to center side of bearing tree marked by a magnetic nail about one foot above ground on the right side facing the tree.



WGS 84 Geodetic postion

Latitude: 44°21'53.47483" N

Longitude: 119°39'18.63602" W

I hereby certify that the above corner monument was re-established as herein described on October 13, 2021.

Witnesses: Gus Gonzalez
Troy Ott

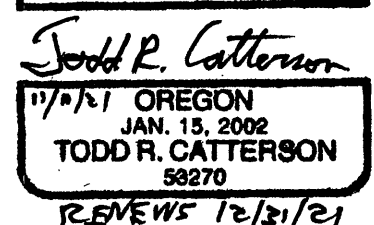

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 24 2021

BY: A handwritten signature of Mark A. Fullerton, with a large circular flourish at the end.

J-01