


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Mark A. Fullerton under General Land Office Contract No. 395 dated May 25, 1881.

Surveyor General's records state:

North on line betw sec's 16X17
80.00 Set basalt stone 14X10X8 in stone mound for cor
to sec's 8, 9, 16&17 from which
a pine 28 in. dia. brs N85°E 21 lks.
a pine 34 in. dia. brs S52°E 31 lks.
a pine 30 in. dia. brs S44°W 34 lks.
a pine 28 in. dia. brs N37°W 32 lks.

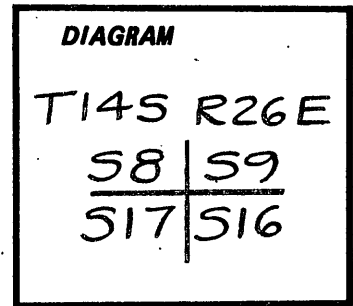

J-9


Description of corner evidence found:

Found a basalt stone 14"X10"X8" in mound of stone 2 ft. diameter. Unable to identify any markings on the stone.
Found original bearing trees: a 28" ponderosa pine (buckskin) dead & down bears North 70°East, 14.0 ft., visible scribing T14R26S9BT; a 35" ponderosa pine bears South 57° East, 21.3 ft., open charred face-scribing illegible; a 26" ponderosa pine (buckskin) dead&down bears South 44° West, 22.6 ft., visible scribing T14R26S17BT; a 33" ponderosa pine bears North 41 1/2° West, 21.3 ft., visible scribing T14SR26ES8/BT.

Description of monument and accessories l. established to perpetuate the original location of this corner:

As the evidence in the corner vicinity agrees with the G.L.O. original record, at the location of the found original stone in mound of stones, set 30 inch long 2 inch I.D. aluminum pipe 22 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:

Marked new bearing trees:
a 6" dbh Douglas fir bears North 64 1/2° East, 26.9 ft. scribed T14SR26ES9BT;
a 7" dbh Ponderosa pine bears South 17 1/2° East, 33.0 ft. scribed T14SR26ES16BT;
a 6" dbh Ponderosa pine bears South 22 1/2 ° West, 11.7 ft. scribed T14SR26ES17BT;
a 10" dbh Douglas fir bears North 83 1/2° West, 34.9 ft. scribed T14SR26ES8BT.
Nailed brass washer marked "LS 1026" in lower blaze of new bearing trees.



Magnetic Declination

17° EAST

Raised a mound of stones 3 1/2 foot base to top of cap and buried the original stone EAST of cap.
Set steel post with sign 54-4 5 feet EAST of and facing cap.
Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on all bearing trees.

I hereby certify the above corner monument was re-established as herein described on JUNE 16, 1982.

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 3 day of Sept, 1982
Robert W. Smith by _____
(COUNTY OFFICIAL) (DEPUTY)

