


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Mark A. Fullerton under General Land Office Contract No. 395 dated May 25, 1881.

Surveyor General's records state:

North on range line west boundary of sec 18
40.00 Set basalt stone 18X14X10 in stone mound
for 1/4 sec. cor.

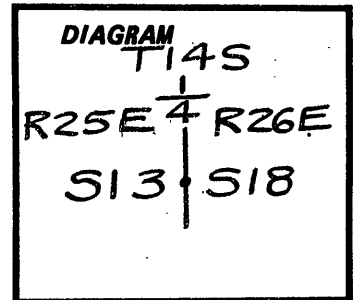

L-1

Description of corner evidence found:

Found a basalt stone 18"X13"X10" marked " $\frac{1}{4}$ " on north face set in north side of stone mound 2 foot diameter.


Description of monument and accessories established to perpetuate the original location of this corner:

As the evidence in the corner vicinity agrees with the G.L.O. original record, at the location of the found original stone in mound of stones, set 30 inch long 2 inch I.D. aluminum pipe $\frac{1}{2}$ inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:

Marked new bearing trees:

a 5" dbh Juniper bears South 39° East, 12.9 ft.
scribed 1/4S18BT;
an 8" dbh Ponderosa pine bears South 63 1/2° West, 49.2 ft.
scribed 1/4S13BT.

Nailed brass washer marked "LS 1026" in lower blaze.



Magnetic
Declination

20°15' EAST

Raised a mound of stones 3 foot base to top of cap and buried the original stone EAST of cap.
Set steel post with sign 54-4 6 feet NORTH of and facing cap.
Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on all bearing trees.

I hereby certify the above corner monument was re-established as herein described on AUGUST 10, 1982.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 3 day of Sept, 1982
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

