


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Mark A. Fullerton under General Land Office Contract No. 395 dated May 25, 1881.

Surveyor General's records state:

North on line betw. sec's 20X21
40.00 Set basalt stone 14X10X8 in stone mound for
1/4 sec. cor.

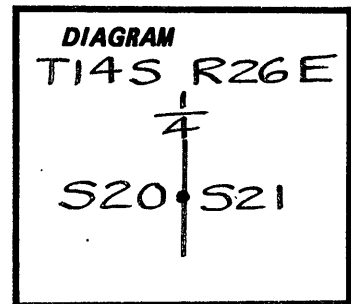

Description of corner evidence found:

Found a basalt stone 13"X10"X8" in west side of ring of basalt stones (7) marked with faint "1/4" on west side.


Description of monument and accessories established to perpetuate the original location of this corner:

As the evidence in the corner vicinity agrees with the G.L.O. original record, at the location of the found original stone in mound of stones, set 30 inch long 2 inch I.D. aluminum pipe 26 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:

Marked new bearing trees:

a 19" dbh Ponderosa pine bears North 68 1/2° West, 41.8 ft. scribed 1/4S20BT;
a 29" dbh Douglas fir bears North 53° East, 11.7 ft. scribed 1/4 S21 BT.

Nailed brass washer marked "LS 1026" in lower blaze.



Magnetic
Declination

20° EAST

Raised a mound of stones 2 1/2 foot base to top of cap and buried the original stone SOUTH of cap.
Set steel post with sign 54-4 6 feet NORTH of and facing cap. Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on all bearing trees.

I hereby certify the above corner monument was re-established as herein described on JULY 13, 1982.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 3 day of Sept, 1982
Robert D. Bright by _____
(COUNTY OFFICIAL) (DEPUTY)

