

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Mark A. Fullerton under General Land Office Contract No. 395 dated May 25, 1881.

Surveyor General's records state:

North on line between sec's 26X27
80.00 Set basalt stone 16X12X9 for cor to
sec's 22, 23, 26 & 27 from which
a pine 30 in. dia. brs N60°W 15 lks.
" fir 12 " " " N50°E 13 "
" " 4 " " " S62°E 8 "
" " 26 " " " S 3°W 18 "

Description of corner evidence found:

Found a basalt stone 17"X11"X9" set in center of stone mound 2 foot diameter marked with 2 grooves on south face and 2 grooves on east face. Found remains of original bearing trees: a 34" Ponderosa pine snag, 10 ft. high charred-opened face to reveal visible scribing "2" bears North 78° West, 9.0 ft.; a 19" Douglas fir burnt snag bears North 81 1/2° East, 7.9 ft.; an 11" Douglas fir burnt snag 15 ft. high bears South 52 1/2° East, 7.9 ft.; a 30" Douglas fir burnt stump 12 inches high bears South 2 1/2° East, 16.7 ft..

Description of monument and accessories established to perpetuate the original location of this corner:

As the evidence in the corner vicinity agrees with the G.L.O. original record, at the location of the found original stone in mound of stones, set 30 inch long 2 inch I.D. aluminum pipe 12 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:

Marked new bearing trees:

a 26" dbh Ponderosa pine bears North 5 1/2° East, 24.6 ft. scribed T14SR26ES23BT;
An 18" dbh Douglas fir bears North 48° West, 128.2 ft. scribed T14SR26ES22BT.

Nailed brass washer marked "LS 1026" in lower blaze.

Marked new bearing objects:

a basaltic rock 2.5ftX3.5ftX1.5 ft. high (exposed) marked "60" bears South 75 1/2° East, 21.57 ft.;
a triangular basaltic rock 5ftX4ftXbaseexposed 0.5 ft. above ground marked " " bears South 34°West, 12.20 ft..

Raised a mound of stones 3 foot base to top of cap and buried the original stone NE of cap.
Set steel post with sign 54-4 5 feet EAST of and facing cap.
Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on all bearing trees.


I hereby certify the above corner monument was re-established as herein described on JULY 8, 1982.

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 3 day of Sept, 1982
Robert P. Leggett by _____
(COUNTY OFFICIAL) (DEPUTY)


REGISTERED
PROFESSIONAL
LAND SURVEYOR

David B. Armstrong

OREGON
AUGUST 22, 1975
DAVID B. ARMSTRONG
1026

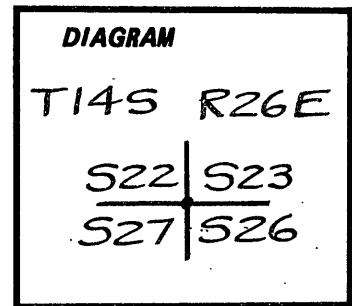

R-17



Magnetic
Declination

21°15' EAST