



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Corner: T14S, R30E, C1/4 Section 1

History of original corner establishment:
No corner has been previously established

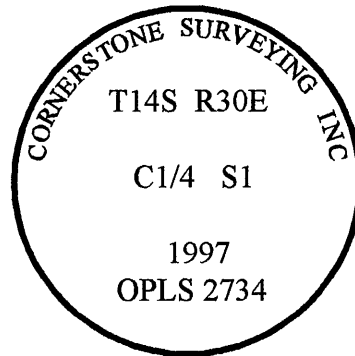

Description of corner evidence found:
NONE

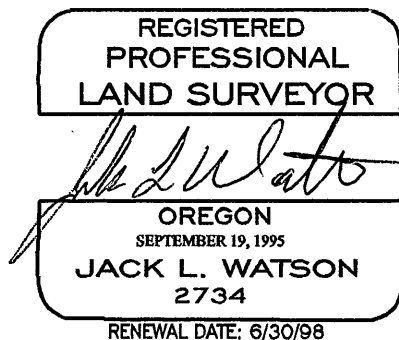

See Land Partition Plat No.97-34

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N29°22'E, 18.50 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S72°42'E, 19.74 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S45°32'W, 21.15 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N51°13'W, 27.31 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used bearings based on Land Partition Plat No. 97-34 and EDM distances, to tie references. A fence line running east-west is 53 feet south of the corner position.

Date: December 8, 1997

Office of Surveyor County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 23 day of DEC, 1997.
Grant S. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)