


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

CORNER: SE Cor. Sec. 3, Twp. 14S., R.30E., W.M.

ORIGINAL SURVEY BY: S.W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880



Subsequent remonumentation by Grant County Surveyor Robert Bagett in 1977

ORIGINAL G.L.O. DESCRIPTION: Set sandstone 16x12x6 in mound of stone for cor. to Secs. 2, 3, 10 & 11.


County Surveyor's 1977 description: "Found the original corner stone a 16"x9"x4" basalt stone marked with an X and 5 grooves and 2 grooves set in a scattered mound of stone, from which a 26" Juniper bears South, about 5.5 chs....At the corner point; Set a 1½"x30" iron pipe 26" in the ground... from which NEW BEARING TREES: An 8" Juniper bears N.58°E., 28.0 ft. mkd. T14SR30ES2 CSBT, A 12" Juniper bears S.38°E., 44.7 ft. mkd. T14SR30ES11 CSBT, A 14" Juniper bears S.66°W., 17.3 ft. mkd. T14SR30ES10 CSBT, A 15" Juniper bears N.32°W., 62.2 ft. mkd. T14SR30ES3 CSBT..."

EVIDENCE FOUND: Found Bagett's 1977 County Surveyor brass cap in good condition. The bearing trees taken in 1977 were all in good health with partially healed blazes. The bearing trees now have the following diameters: The NE BT: 13", the SE BT: 17½", the SW BT: 14", the NW BT: 17".

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

At the corner point, we removed and reattached the 1977 BT tag on each tree. We also rebuilt the mound of stone, now 3 ft. base to top of cap.

See Record Map of Survey No. 2024

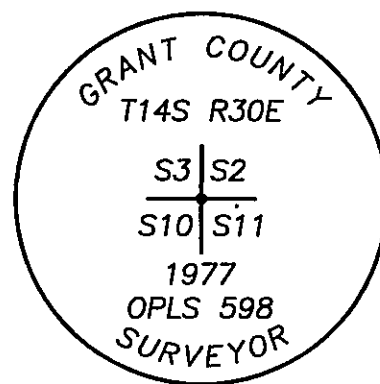

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 262,530.1
Easting: 8,569,840.0
Ellip. Ht: 3,439.6

RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Jason L. Hatfield, PLS
Deputy County Surveyor

217 N. Canyon Blvd.
John Day, OR 97845


Surveyed: March 27, 2015
— Aug. 11, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

AUG 12 2015

BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2016