


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: S. W. Lackland , Deputy Surveyor,
under Contract No. 357, dated July 2, 1880.

Surveyor General Record States: Set stone 14x10x10 in mound of
stone for 1/4 section corner.

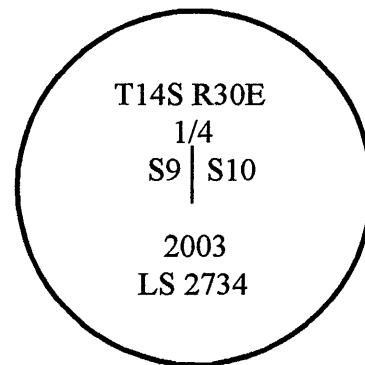

Description of corner evidence found:

Found stone 14x10x8 inches, marked "1/ S" on west face, the
four is not visible, in a ring of stone.

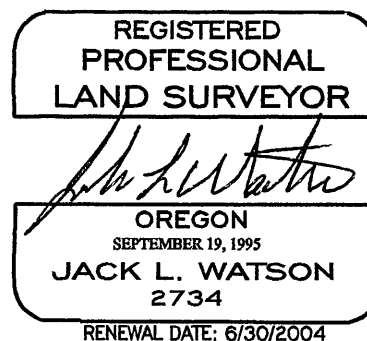

See Land Partition Plat No. 2003-4

Description of monument and accessories set at corner location:

I accept the marked stone for the 1/4 corner. I set a 2½"x30" aluminum pipe with attached 3"
aluminum cap, 28 inches in the ground, surrounded by a mound of stone. I buried the original
marked stone north and alongside the pipe. The cap is stamped as shown in the diagram.

From which:

- A 6" Juniper bears N45°E, 4.43 feet, marked 1/4S10BT.
- A 4" Juniper bears S18°E, 8.44 feet, marked XBT.
- A 5" Juniper bears S06°W, 4.11 feet, marked XBT.
- A 8" Juniper bears N28°W, 12.79 feet, marked 1/4S9BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's
and magnetic compass, with 18° E. declination.

Date: April 23, 2003

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 30 day of MAY, 2003.
Robert L. Bagon by _____
(COUNTY OFFICIAL) (DEPUTY)