


CORNER RESTORATION

CORNER: N1/4 SEC. 17 TWP. 14 S. RANGE 30 E.

ORIGINAL SURVEY BY: S.W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

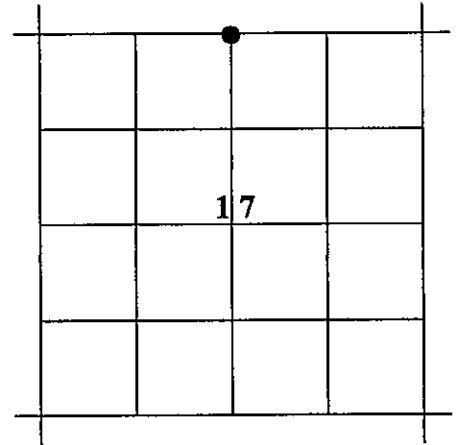

ORIGINAL DESCRIPTION: Set Stone 14X10X6 in mound of Stone for 1/4 Sec. cor.

RESTORATION BY, STAMP AND DATE:

M.C. Springer, PLS
J.L. Hatfield, PLS

RECEIVED AND
FILED

Sept. 11, 2009
OFFICE OF COUNTY SURVEYOR
ATTEST: *Jason L. Hatfield*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jason L. Hatfield
OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454
EXPIRES: 6/30/2011

Grant County Surveyor
(Deputy)

August 27, 2009

EVIDENCE FOUND: On November 24, 2007, we found an unmarked basalt stone, 13x10x8, firmly set in a 2 foot mound of stone. All the stones were covered with thick moss. We also found a Blue Mountain Mills aluminum K-tag attached to a 4" diameter mountain mahogany. The tag was marked SEC 17 T14S R30E 4' NE TO 1/4 CORNER J.E. SHAW OLS 280 dated July 10, 1954. We also found old down remains of a wire fence extending East and South. When we returned to this corner in August 2009, there was a newly constructed rock jack fence corner approx. 0.5' SE of corner position. The original corner stone was missing, but the old mound and the K-Tag still remained.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

At the corner point: I set a 1½"x20" galv. iron pipe, 18" in the ground, with attached Grant County Surveyor brass cap. We improved the existing 2 foot mound of stone. Brass Cap is marked as shown below.

From which, I SCRIBE THE FOLLOWING BEARING TREES:


A 10" DBH mountain mahogany bears N47°E, 67.0 ft., marked T14S R30E 1/4 S8 CSBT.

A 16.5" DBH ponderosa pine bears S68°W, 28.30 ft., marked T14S R30E 1/4 S17 CSBT.

I also SET THE FOLLOWING REFERENCE POINTS:

A 5/8" iron pin bears S00°11'10"E, 35.14 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP 1 2009.

A 5/8" iron pin bears N87°57'48"W, 114.14 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP 2 2009.

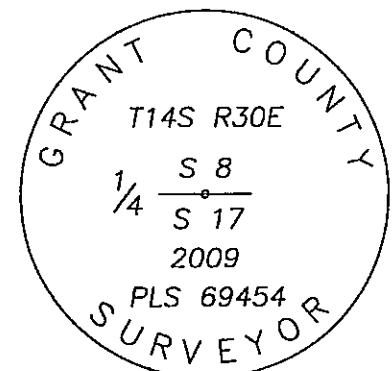

Used magnetic compass with 17°E Declination and a steel tape to measure the BT's, measuring to a 50d nail driven in the side-center at the root crown of the trees. Used RTK GPS to measure RP's. Attached a BT tag to the trees. Bearings are based on geodetic North from a GPS observation taken near the center of Section 17.

STATE PLANE COORDINATES (3601 OR N) Reference Datum: NAD83

Northing: 256,774.74 ft.

Easting: 8,556,670.85 ft.

Ellipsoid ht: 4,285.9 ft.