


CORNER RESTORATION

SE Cor.
CORNER Sec. 8 TWP 14 S. RANGE 30 E., W.M.

ORIGINAL SURVEY BY: S. W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

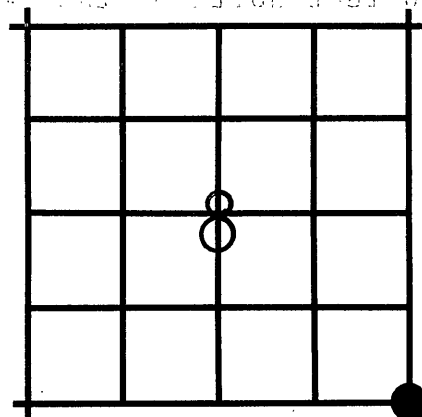

ORIGINAL DESCRIPTION:

Set stone 14x12x8 in mound of stone for corner to Sec's. 8, 9, 16 and 17.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1969
ROBERT D. BAGETT
598

September 29, 1988

Grant County Surveyor

EVIDENCE FOUND:

Found the original basalt corner stone 12x8x8 inches marked with 4 grooves and 4 grooves and a cross firmly set in a mound of stone. I accept stone for the section corner.

RECEIVED AND
FILED

NOV 4 1988

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Bagett*

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a 1½" x 30" galvanized iron MONUMENT MARKED pipe 24 inches in the ground with attached brass cap marked as shown; From which I scribe NEW BEARING TREES:

A mahogany 6 inch diameter bears N. 40° E., 37.6 feet marked T14SR30E S9 CSBT.

A Juniper 4 inch diameter bears S. 55° E., 55.6 feet marked X CSBT.

A Juniper 12 inch diameter bears S. 03° W., 107.6 feet marked T14SR30E S17 CSBT.


A P. Pine 22 inch diameter bears N. 29° W., 86.8 feet, marked T14SR30E S8 CSBT.

Buried original corner stone North and alongside iron pipe.

Raised a mound of stone, 3 foot base to top of cap.

Used magnetic compass, with 17° E., variation, and steel tape, measuring to 50d nail driven in side center at root crown of BT's.

Painted scribing blazes with red timber marking paint and attached county

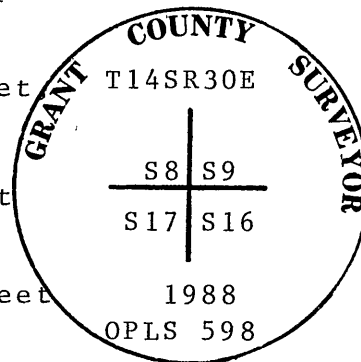

(OVER)

J-9