

CORNER RESTORATION


CORNER: W1/4 Sec 1 TWP 14S. RANGE 31E.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

Subsequently resurveyed and remonumented by Michael Spears, Co. Surveyor in 1909, and remonumented by Robert D. Bagett, County Surveyor in 1969. See Corner restoration records.

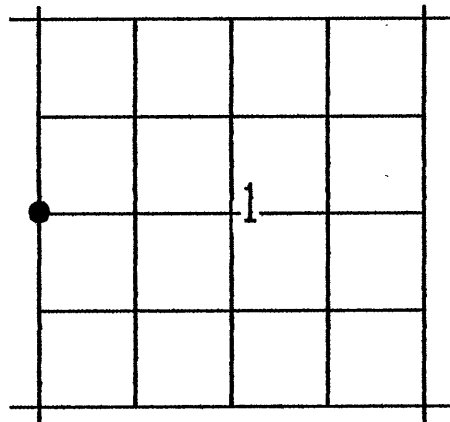

ORIGINAL DESCRIPTION: Set Stone 10x8x6 in mound of stone for 1/4 sec. cor.

Spears Record: Survey Record Book 1 Page 66 states: ...and I place the W1/4 Corner according. The same being an Iron pipe 2" dia. Set 24" deep split and spread at bottom for W 1/4 Sec 1 T14SR31E from which a a Juniper 6" dia. bears N74°58'W 131.4 ft. marked BT meas to base a Cottonwood S10°27'E 322.5 ft. marked BT

In 1923 this line was retraced by John G. Collins, U.S. cadastral Engineer. Collins found an iron pipe 2" diam. extending 6" above the ground, and states: "This cor. was reestablished by the County Surveyor, and all adjacent improvements accept it as being the point for the 1/4 sec. cor.

I found the 2" iron pipe with a 2½" iron pipe driven over the outside in 1969, my record states:

I set a 2½" diam. brass cap with ½" stem into the existing iron pipe, permanently joining the two by means of liquid sulfur.

New BT's:

A juniper 5"diam., bears S50°E, 50.8 feet dist., scribed 1/4 S1 BT.

A juniper 8"diam., bears S88°W, 19.6 feet dist., scribed T14SR31E 1/4 S2 BT

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

FEB 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST:

Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

January 6, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 2" iron pipe with a 2½" iron pipe driven over the outside.

From which:

A Juniper 8"diam., bears S48°E, 50.8 ft., with partially healed over blaze, scribing visible.

A Juniper 12"diam., bears N87°W, 19.6 ft., with partially healed over blaze, scribing visible.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var..

At the corner point: I set a ½"x3" brass stem grouted into, and bolted onto the top of the 2" and the 2½" iron pipes, with attached Grant County Surveyor brass cap marked as shown.

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N46°E, 20.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S46°W, 30.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR

T14S R31E

¼

S2 | S1

1995

OPLS 598

Raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's. C-21