


CORNER RESTORATION

CORNER: C1/4 CORNER SEC. 1 TWP. 14 S. RANGE 31 E.

ORIGINAL SURVEY BY: Corner Not

CONTRACT NUMBER: Previously

CONTRACT DATE: Established

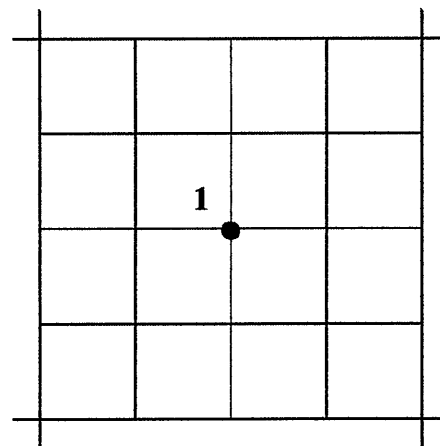

ORIGINAL DESCRIPTION: None

RESTORATION BY, STAMP AND DATE:

M.C. Springer, PLS

J.L. Hatfield, LSIT

RECEIVED AND
FILED

July 20, 2006
OFFICE OF COUNTY SURVEYOR
[Signature]
ATTEST: *[Signature]*



July 10, 2006

EVIDENCE FOUND: None

See Record Map of Survey No. 1765

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached Bagett-Griffith and Blackman brass cap marked as shown.


From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N32°E, 36.85 ft., with attached alum. cap marked BGB SURVEY MARKER
RP 1 2006

A 5/8"x30" iron pin, bears S53°E, 20.53 ft., with attached alum. cap marked BGB SURVEY MARKER
RP 2 2006

A 5/8"x30" iron pin, bears S14°W, 18.34 ft., with attached alum. cap marked BGB SURVEY MARKER
RP 3 2006

A 5/8"x30" iron pin, bears N53°W, 22.09 ft., with attached alum. cap marked BGB SURVEY MARKER
RP 4 2006

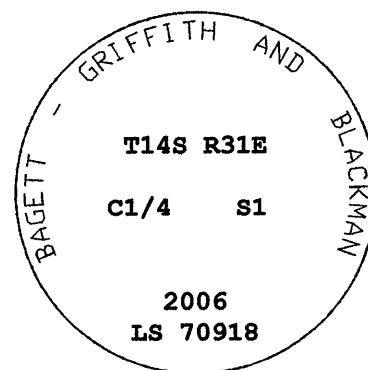

Raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 17°E var. and a steel tape to measure RP's.