


CORNER RESTORATION

N1/4 COR.
CORNER Sec.10 TWP 14 S. RANGE 31 E.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

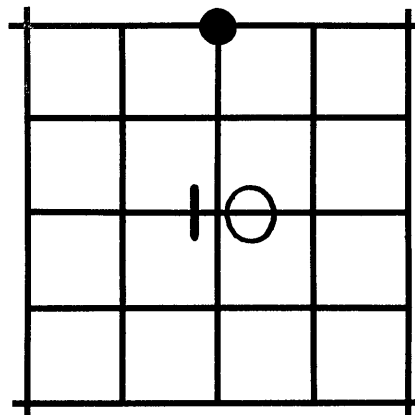

ORIGINAL DESCRIPTION: G.L.O Notes state: Set stone 24"x20"x8" in a mound of stone for 1/4 section corner.

In June 1909, Michael Spears retraced the North line of section 10, recorded in Surveyors Record Book No. 1, page 27, which states: N1/4 Cor. Sec. 10 a rock 14x14x14 set deep with pits. A Juniper snag bears S5°30'W 384 lks.. Chimney of house bears N26°45'W 725 lks.. Solitary ledge of rocks bears N61°15'E about 9 Ch. Spring branch E. 150 lks. Course N..

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
G.J. Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Feb.28, 1991

Grant County Surveyor

EVIDENCE FOUND:

Found the monument set by Spears in 1909, which is a stone 19"x16"x14" dimly marked and firmly set in a mound of stone. I accept this stone for the position of the N1/4 corner sec. 10

RECEIVED AND
FILED

APR 10 1991

OFFICE OF COUNTY SURVEYOR
Attest:

See Record Map of Survey No.1164.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" Galv. iron pipe, 28" in the ground, with attached Grant County Surveyor Brass Cap marked as shown.

From which I SCRIBE NEW BEARING TREES:


A Juniper 24"diam., bears N37°E, 87.5 ft. marked 1/4S3 CSBT.

A Juniper 12"diam., bears S44°E, 111.2 ft. marked 1/4S10 CSBT.

A Juniper 5"diam., bears S43°W, 22.3 ft. marked X CSBT, in N-S fence line.

A Juniper 27"diam., bears N41°W, 23.3 ft. marked X CSBT, in N-S fence line.

MONUMENT MARKED

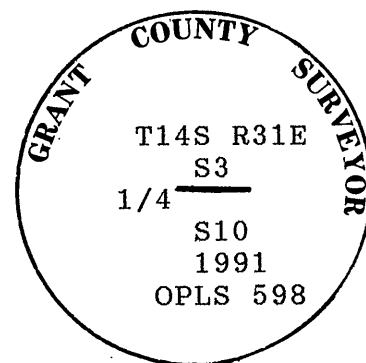

Buried marked stone east and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached GCS BT tags.