

CEIVED AND

FILED

JUL 8 1973

JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By _____ Deputy

West $\frac{1}{4}$
CORNER Sec. 10 TWP 14S RANGE 31E., W.M.

ORIGINAL SURVEY BY: Robb and Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

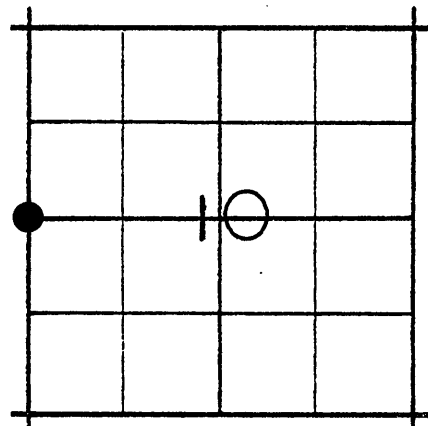

ORIGINAL DESCRIPTION: North Between secs. 9 and 10.
40.00 Set stone 12x9x7" in a mound of stone for $\frac{1}{4}$ sec. cor.

This $\frac{1}{4}$ corner was subsequently established by Michael Spears, County Surveyor, June 2, 1909, recorded survey on pages 26, 27, & 28 of Surveyors Record Book 1 of County Surveyors Records. On page 27 Mr. Spears describes the $\frac{1}{4}$ corner which he set as follows:

W. $\frac{1}{4}$ corner-A rock buried deep marked $\frac{1}{4}$ a mound of rocks with pits
A ledge with X mark chisel on E face S83°35'W 311 lks.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

May 24, 1973

Grant County Surveyor

EVIDENCE FOUND: The original $\frac{1}{4}$ corner stone was not found. I did find the X chiseled on the rock ledge that Mr. Spears took for a bearing object and ran out record bearing and distance to the $\frac{1}{4}$ corner. I did not find the stone set by Mr. Spears. There has been much farming activity in the area, and the $\frac{1}{4}$ corner falls in a seeded field, and has probably been plowed out.

I did, however, make a diligent search for Spears corner stone by digging up a 10 ft. square area at the $\frac{1}{4}$ cor. position.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.


At the corner point, set a $1\frac{1}{2}$ "x30" iron pipe 26 inches in the ground with brass cap marked as shown. from which NEW BEARING TREES

A 24" cottonwood bears S 57° 22'E., 120.7 ft. MONUMENT MARKED
marked $\frac{1}{4}$ S10 CS BT.

A 10" juniper bears N75°47'W., 230.4 ft., marked
 $\frac{1}{4}$ S9 CS BT.

True bearings(solar observation) and steel tape measured to the face of the blaze on BTs.

This corner is about 130 feet North of a S & W
Complete and File with Office of the Grant fenceline fence cor.
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

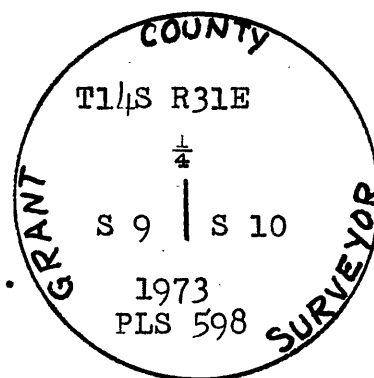

G-13