

RECEIVED A
FILE
MAY 22 1972
JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By _____ Deputy

$\frac{1}{4}$ Cor. bet.
CORNER sec 25 & 26 TWP 14S RANGE 31E

ORIGINAL SURVEY BY: Robb and Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

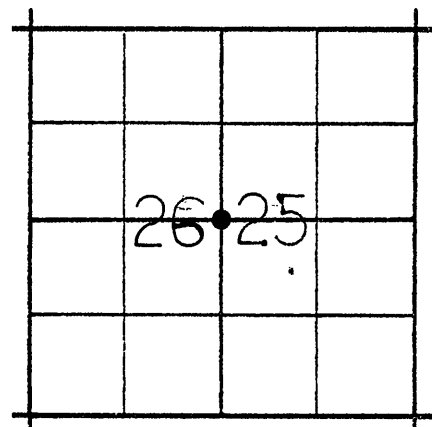

ORIGINAL DESCRIPTION:

North between secs. 25 & 26.

40.00 Set stone 16x10x5 ins. for $\frac{1}{4}$ sec.cor. from which

A pine 24 ins. diam. bears S.85°E., 53 lks. dist.

A pine, 48 ins. diam., bears N.88°W., 83 lks. dist.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON

170 S. DAYTON - PH. 575-1251

JOHN DAY, OREGON 97845

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

April 24, 1972

EVIDENCE FOUND:

Found a serpentine stone of call size, dimly marked
from which

the original bearing trees:

A 40" burned out stump bears S.86°E., 35.0 feet, no scribing visible, BLM
tag on this stump.

A 30" burned out stump bears N.89°W., 54.8 feet, no scribing visible.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point, set a $1\frac{1}{2}$ "x30" galv.iron pipe 28" in the ground
with brass cap marked as shown.

from which NEW BEARING TREES:

A 8"pine bears S61°E 23.6 feet, marked $\frac{1}{4}$ S25 CS BT.

A 9"pine bears S69°W., 34.1 feet, marked $\frac{1}{4}$ S26 CS BT.

A 10"pine bears N44°W., 16.0 feet, marked $\frac{1}{4}$ S26 CS BT.

Buried original stone North and alongside iron pipe.
Surround pipe with a mound of stone.

Compass bearings with 20°East var. used.


Distances are to center of new BTs.

Complete and File with Office of the Grant

County Surveyor, Grant County, Oregon,

Courthouse, Canyon City, Oregon 97820

MONUMENT MARKED

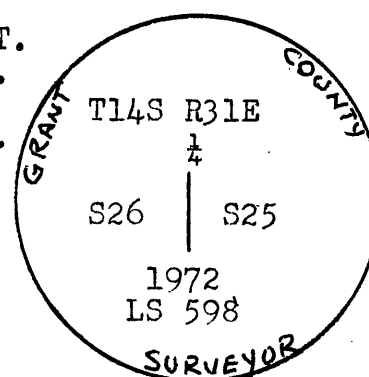

T-21