


CORNER RESTORATION

S.E. Cor.
CORNER Sec. 26 TWP 14 S. RANGE 31 E.

ORIGINAL SURVEY BY: Robb and Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: 1880


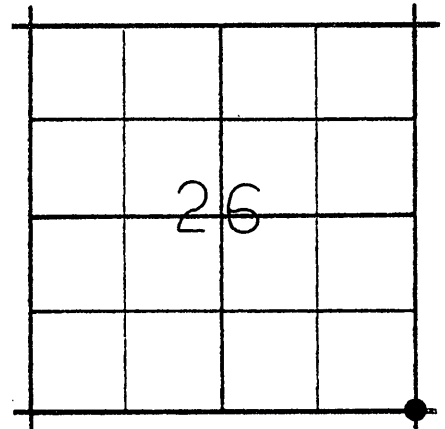


ORIGINAL DESCRIPTION:

Set stone 12x10x10 ins. for corner to Sections 25, 26, 35 & 36 from which
a pine 36" in dia. bears S85°W 18 lks. dist.
a pine 18" in dia. bears N30°E 50 lks. dist.
a pine 14" in dia. bears N40°W 80 lks. dist.
a pine 14" in dia. bears S65°E 35 lks. dist.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON
170 S. DAYTON - PH. 575-1251
JOHN DAY, OREGON 97845

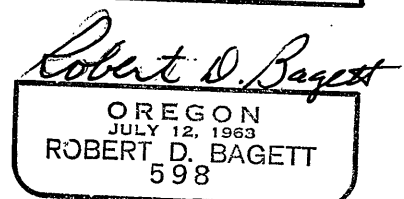

April 6 1972

EVIDENCE FOUND:

At corner point, found 5/8"x24" copper ground rod set in a small mound of stone at Record bearing and distance from the only B.T. remaining which is a 24" pine stump marked 1/4 S.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set 1 1/2"x30" galvanized iron pipe 28" deep with brass cap marked as shown: from which original B.T. stump bears N30°E 33 ft.

New B.T.'s

A 11" pine bears N40°E 44.0 ft., mkd. T14SR31E S25 CS BT

a 8" pine bears S48°E 52.0 ft., marked

T14S R31E S36 CS BT.

a 12" pine bears S76°W 99.3 ft., marked

T14S R31E S35 CS BT.

a 9" pine bears N2°W 53.3 ft., marked


T14S R31E S26 CS BT.

Fence cor. of fences running N-E-W brs S62°E 9 ft.

Buried rod N. and along side of iron pipe and made Complete and File with Office of the Grant mound of stone.

County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820
Compass var. 20° East measurements to center of B.T.'s

MONUMENT MARKED

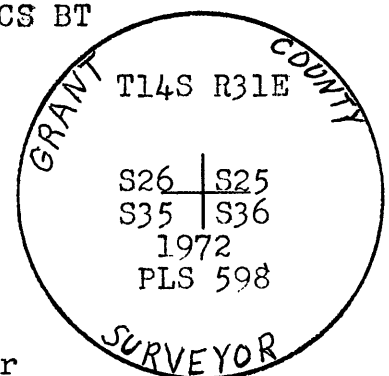

V-21