


RECORD OF LAND CORNER MONUMENTATION

CORNER: C-S1/16 Cor. Sec. 36, Twp. 14S., R.31E., W.M.

ORIGINAL SURVEY BY: CORNER

CONTRACT NUMBER: NOT PREVIOUSLY

CONTRACT DATE: ESTABLISHED



ORIGINAL G.L.O. DESCRIPTION: None, corner not previously established.


EVIDENCE FOUND: None, corner not previously established.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

At the corner point, I set a 5/8"x30" iron pin driven 28 inches in the ground with attached 1 1/2" aluminum cap, marked as shown below. I built a 2 ft. mound of stone around the cap.

FROM WHICH, I set the following reference points:

- A 5/8" x 30" iron pin bears N.56°07'E., 18.84 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING.
- A 5/8" x 30" iron pin bears N.21°53'W., 16.95 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

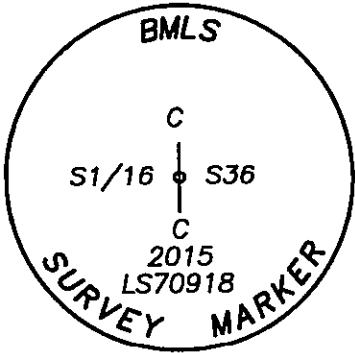

Distances to reference points measured using RTK GPS. Bearings shown hereon are based on Record Map of Survey No. 2034

RESTORATION BY:

Michael C. Springer, PLS
217 N. Canyon Blvd.
John Day, OR 97845
(541) 575-1251

Survey Completed
June 26, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

JUL 1 2015

BY:

