

RECEIVED AND
FILE

APR 1 1974

JOHN DIVEIRA, County Clerk

By *Betty Lowery* Deputy


CORNER RESTORATION

CORNER NE Closing Cor.
Sec 6 TWP 14 S. RANGE 32 E., W.M.

ORIGINAL SURVEY BY: S.W. lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

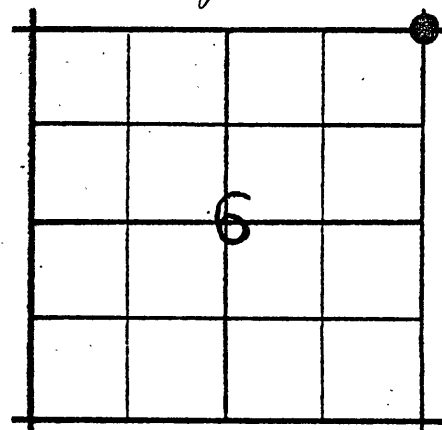

ORIGINAL DESCRIPTION:

North between secs. 5 & 6.
Var. 18° E.

56.90 Intersected Township line 44.30 chs. west of the cor. to secs. 31 & 32 at which point I set a stone 16x12x12 in mound of stone for closing cor. to secs. 5 & 6.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

March 9, 1974

County Surveyor

EVIDENCE FOUND: Found a dim mound of stone surrounding a depression in the ground, with the original stone in a fence jack nearby. The original stone is of serpentine, is 13x11x12 inches in size and is plainly marked with the letters "CC". This corner is on the township line and is on the extension of the remains of an ancient fenceline to the south, it is also in an East-West fenceline. The position of this corner is in harmony with other known corners in the area.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. At the Corner Point: Set a 1 1/2" x 30" iron pipe 28 ins. in the ground with brass cap mkd. as shown from which NEW BEARING TREES:

A 10" juniper brs. S48° 32' W, 145.07 feet, mkd.
S6 CC CSBT.


A 14" juniper brs. S16° 05' E, 250.9 feet, mkd.
S5 CC CSBT.

The south 1/4 cor. sec. 31, T13S., R32E., brs.
S.89° 49' 52" E., 281.12 feet.

MONUMENT MARKED

I buried the original marked corner stone East & alongside the iron pipe. True bearings, and steel Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

tape used to BTs., measuring to the face of the blaze.

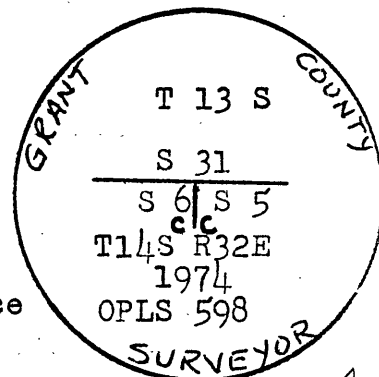

A-5