


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by : S.W. Lackland, Deputy Surveyor
under Contract No. 357 dated July, 2, 1880.

Surveyor General Record State: Set stone 14x12x6 in mound of stone
for 1/4 section corner.

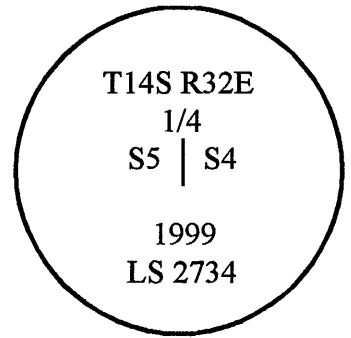

Description of corner evidence found:

Found a stone 15"x11"x5" marked 1/4 S.

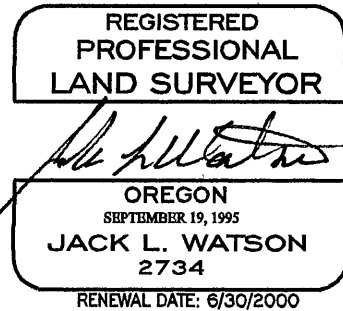

See Record Map of Survey No. 1536

Description of monument and accessories set at corner location:

I accept the marked stone for the corner position. I set a 2½"x 30" aluminum pipe with attached 3½" aluminum cap, set 24 inches in the ground, placed marked corner stone north and along side the pipe, surrounded pipe with a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

- A 16" diam. Fir bears N25°E, 13.05 feet, marked 1/4S4 BT.
- A 11" diam. Juniper bears S55°E, 35.00 feet, marked 1/4S4 BT.
- A 13" diam. P.Pine bears S01°W, 32.82 feet, marked 1/4S5 BT.
- A 5" diam. Juniper bears S84°W, 43.75 feet, marked X BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: October 29, 1999

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this
 office for record on the 24 day of NOV, 1999.
Robert D. Biggett by _____
 (COUNTY OFFICIAL) (DEPUTY)