

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: S.W. Lackland, Deputy Surveyor
under Contract No. 357 dated July, 2, 1880.


Surveyor General Record States:

Set stone 16x12x8 inches, in mound of stone for 1/4 section corner.

From which:


A Pine 4 inches diam. bears N83°W, 7 lks distance

A Pine 6 inches diam. bears S72°E, 24 lks distance

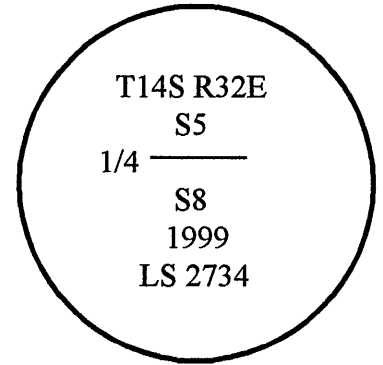

Description of corner evidence found:

No evidence of this corner remains. The search area falls in an area that has been logged several times in the past.

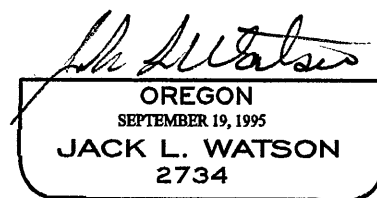

RENEWAL DATE: 6/30/2000

See Record Map of Survey No. 1536

Description of monument and accessories set at corner location:

At the point determined by single proportionate measure I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 12 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 5" Juniper bears N45°E, 33.88 feet, marked XBT.

A 9" P.Pine bears S52°E, 19.75 feet, marked 1/4S8BT.

A 13" Fir bears S55°W, 55.07 feet, marked 1/4S8BT.

A 9" Juniper bears N40°W, 47.93 feet, marked 1/4S5BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: November 12, 1999

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 24 day of NOV, 1999.
Robert D. Bayless by _____
(COUNTY OFFICIAL) (DEPUTY)