


CORNER RESTORATION

East $\frac{1}{4}$ cor.
CORNER Sec. 10 **TWP** 14S **RANGE** 32E

ORIGINAL SURVEY BY: S. W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

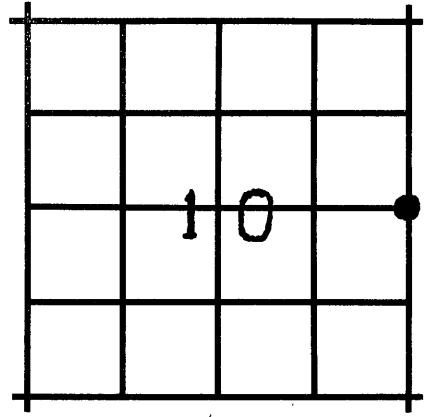

ORIGINAL DESCRIPTION:

North between Secs. 10 and 11.


38.50 Creek 10 lks. wide flows N.E.

40.00 set stone 16x12x6 in a mound of stone for $\frac{1}{4}$ sec. cor. from which:


A pine 20" in diam. bears S. 5° E. 27 lks. dist.
 An alder 6" in diam. bears S. 76° W. 39 lks. dist.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
 W. Gentis



Robert D. Bagett



Grant County Surveyor

June 22, 1976

**RECEIVED AND
 FILED**

DEC 20 1976
John Liveira
 JOHN LIVEIRA, County Clerk

By _____ Deputy

EVIDENCE FOUND:

Found original stone, a 16"x12"x6" rounded river rock marked $\frac{1}{4}$ in a small mound of stone, from which:

A 20" rotten pine stump brs. S. 5° E., 17.8 ft., no scribing visible.

I found no trace of the other original BT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 26" in the ground in a mound of stone with brass cap marked as shown. Buried original stone North and alongside. From which I scribe NEW BEARING TREES:

A white fir 18" in diam. bears N. 67° W., 26.5 ft., mkd. $\frac{1}{4}$ S10CSBT.

A tamarack 12" in diam. bears N. 36° E., 22.2 ft., mks. $\frac{1}{4}$ S11CSBT.

$\frac{1}{4}$ corner is 1 $\frac{1}{2}$ chains South of Dean Creek, not North of Dean Creek as called in original notes. Creek runs N.E.

Fence - 44 ft. East of $\frac{1}{4}$ cor. bears North and South. I used compass with 20° East variation and steel tape measuring to face of blaze.

MONUMENT MARKED

