

CORNER RESTORATION


Center $\frac{1}{4}$ corner
CORNER Sec. 11 TWP 14 S. RANGE 32 E.

ORIGINAL SURVEY BY:

No prior record establishing
this corner.

CONTRACT NUMBER:

CONTRACT DATE:

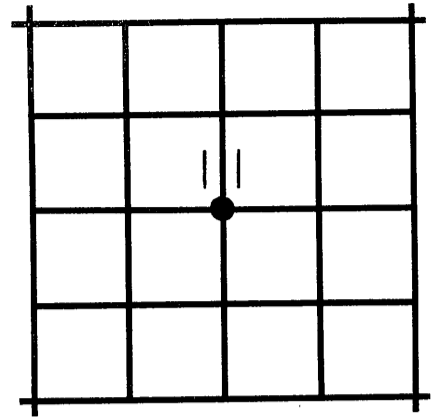

ORIGINAL DESCRIPTION:

None

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson

May 27, 1983

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Grant County Surveyor

EVIDENCE FOUND:

None

RECEIVED AND
FILED

JUN 15 1983

OFFICE OF COUNTY SURVEYOR

Attest

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the center $\frac{1}{4}$ corner of Sec. 11, the position of which is determined at the intersection of lines of opposite corresponding $\frac{1}{4}$ corners, I star drilled a $\frac{1}{2}$ " hole $2\frac{1}{2}$ " deep into bedrock and set a $\frac{1}{2}$ "x $2\frac{1}{2}$ " brass stem with a $1\frac{1}{2}$ " diameter brass cap attached into the hole. I then grouted the stem to the bedrock. Brass cap is marked as shown, from which I scribe

NEW BEARING TREES:


A Pine, 13" diam. bears S. 48° E., 15.0 ft., mkd.

C $\frac{1}{4}$ S11 CSBT.

A Red Fir, 7" diam. bears S. 86° W., 19.7 ft., mkd.

C $\frac{1}{4}$ S11 CSBT.

MONUMENT MARKED

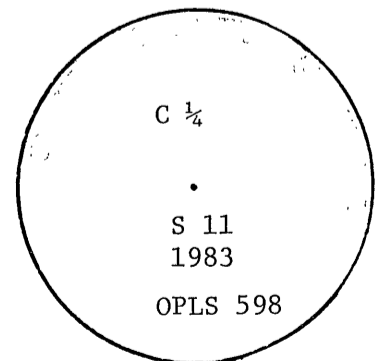

Used a magnetic compass with 20° E. variation and a steel tape, measuring to the head of a nail driven flush with the BT's scribing blaze.

I tagged both trees with Grant County Surveyor Bearing Tree tags.