


# CORNER

# RESTORATION

CORNER: C ¼Cor Sec 11 TWP 14S. RANGE 32E.

ORIGINAL SURVEY BY: Corner not established during original G.L.O. survey.

CONTRACT NUMBER:  
 CONTRACT DATE: July 2, 1880  
 Subsequently surveyed and monumented by Robert D. Bagett, County Surveyor, May 27, 1983.  
 See corner restoration records.

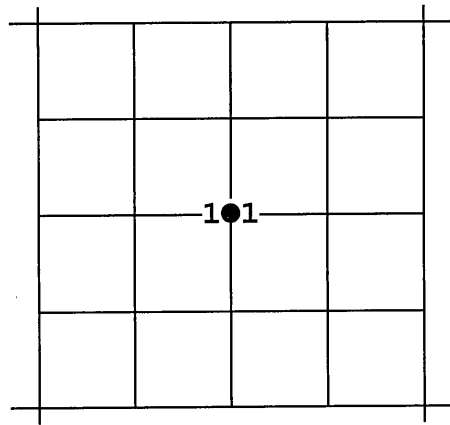

ORIGINAL DESCRIPTION: None.

My record of May 27, 1983 states:

I star drilled a ½" hole 2½ deep into bedrock and set a ½"x2½" brass stem with a 1½" diameter brass cap attached into the hole. I then grouted the stem to the bedrock. Brass cap is marked as shown, from which I SCRIBE NEW BEARING TREES:

- A Pine, 13" diam., bears S48°E, 15.0 feet, mkd. C¼ S11 CSBT.
- A Red Fir, 7" diam., bears S86°W, 19.7 feet, mkd C¼ S11 CSBT.

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
 S.D. Follweiler  
 D.E. Mooney

RECEIVED AND FILED

Oct 21, 1997  
 OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*

ATTEST: *Mavis J. Newkum*

REGISTERED PROFESSIONAL LAND SURVEYOR

*Robert D. Bagett*  
 OREGON  
 JULY 12, 1963  
 ROBERT D. BAGETT  
 598

RENEWAL DATE 12/31/97

Sept. 9, 1997

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" brass cap, marked as shown below, grouted into bedrock.

From which:

- A Pine, 15" diam., bears S48°E, 15.0 ft. with partially healed over blaze, scribing visible.
- A Red Fir, 8" diam., bears S86°W, 19.7 ft., scribed, is dead and standing.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var. **MONUMENT MARKED**

The monument set in 1983 is in good condition.

From which: I SET NEW REFERENCE POINTS:

- A 5/8"x30" iron pin bears N45°E, 25.00 ft., with attached alum. cap marked C¼  
 GRANT COUNTY SURVEYOR RP1 1997 OPLS 598. S11
- A 5/8"x30" iron pin bears S45°W, 25.00 ft., with attached alum. cap marked 1983  
 GRANT COUNTY SURVEYOR RP2 1997 OPLS 598. OPLS 598
- A 5/8"x30" iron pin bears N48°W, 25.00 ft., with attached alum. cap marked  
 GRANT COUNTY SURVEYOR RP3 1997 OPLS 598

Used mag. compass with 20°E var. and a steel tape.