

CORNER


RESTORATION

CORNER: S¼Cor Sec 11 TWP 14S. RANGE 32E.

ORIGINAL SURVEY BY: S.W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880
Subsequently remonumented by
Robert D. Bagett, County Surveyor,
May 27, 1983.
See corner restoration records.

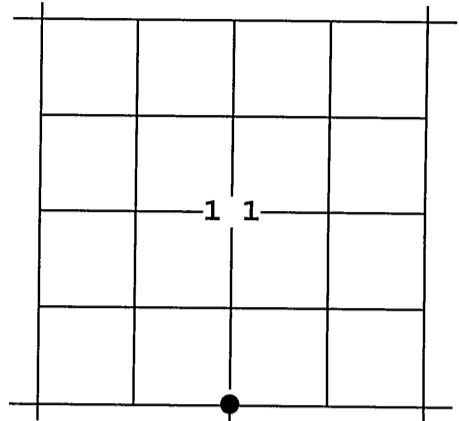

ORIGINAL DESCRIPTION:

Set Stone 16x14x8 in mound of stone for ¼ Sec. Cor.

In 1983 I found the original basalt stone 14x12x5 inches lying face up on a 2 ft. wide ledge at the base of a solid rock cliff with one other large stone. My record states:

Set a 1½"x30" galvanized iron pipe 22 inches in the ground with brass cap marked as shown;

from which I SCRIBE NEW BEARING TREES:

A scrub Juniper, 24" diam., bears N55½°W, 100.1 feet, mkd.

T14S R32E ¼ S14 CSBT.

A scrub Juniper, 5" diam., bears N77½°W, 62.6 feet, mkd. X CSBT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
D.E. Mooney

RECEIVED AND
FILED

Oct 21, 1997
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Marilyn Anderson*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
RENEWAL DATE 12/31/97

Sept. 9, 1997

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" galvanized iron pipe with a Grant County Surveyor brass cap, marked as shown below, firmly set in a mound of stone.

From which:

A scrub Juniper 25" diam., bears S55½°W, 100.1 ft. mkd. T14S R32E S14 CSBT.

A scrub Juniper 7" diam., bears N77½°W, 62.6 ft. mkd X CSBT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1983 is in good condition.

From which: I SET NEW REFERENCE POINTS:

A 2½"x¼" diam. PK nail, driven into bedrock, bears
S70°E, 4.52 ft.

A 2½"x¼" diam. PK nail, driven into bedrock, bears
N51°E, 11.60 ft

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T14S R32E

S11

¼ ———
S14

1983
OPLS 598

Used mag. compass with 20°E var. and a steel tape.