


CORNER RESTORATION

Closing Cor. bet.
 Secs. 4 & 5 14S
 CORNER _____ TWP _____ RANGE 33 E, W.M.

ORIGINAL SURVEY BY: Banford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

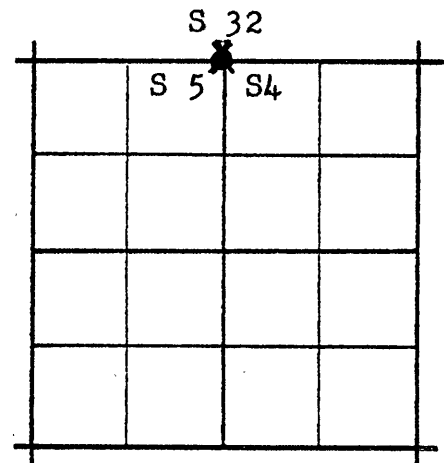

ORIGINAL DESCRIPTION:


North between secs. 4 and 5. Va. $18^{\circ}45'$
 12.50 Brook 20 lks wide, flows NE.
 40.00 Set basalt stone $18 \times 10 \times 6$ in. mound of stone for $\frac{1}{4}$ sec. cor.
 57.46 Intersected Township boundary 47.04 chs. west of established cor. to
 secs. 32 and 33 at which point I set a basalt stone $16 \times 12 \times 8$ in a stone
 mound for closing cor. to secs. 4 & 5.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON
 170 S. DAYTON - PH. 575-1251
 JOHN DAY, OREGON 97845



Douglas M. Ferguson



May, 15, 1971

EVIDENCE FOUND:

Found a basalt stone $18 \times 10 \times 8$ marked CC on one face with 4 notches on one edge and 2 notches on other edge, 4 ft. SE of fence cor.

The fence cor. post supports a location tag put up by the BLM in 1963 and gives the direction and dist. to the closing cor. as SE 4 ft.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set a $1\frac{1}{2} \times 36$ " iron pipe 24 ins. in the ground with brass cap mkd as shown.
 MONUMENT MARKED

Surround pipe with a mound of stone, 3 ft. base to top of pipe.

Cor. is 4 ft SE of cor. of fences running South, East, and West, and is about 10 feet East of driveway leading to a ranch house.
 No. BTs. available.

Complete and File with Office of the Grant
 County Surveyor, Grant County, Oregon,
 Courthouse, Canyon City, Oregon 97820

