

RECORD OF LAND CORNER MONUMENTATION


CORNER: N $\frac{1}{4}$ Cor. Sec. 9, Twp. 14S., R.33E., W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

SUBSEQUENT SURVEY: Jack L. Watson 2003

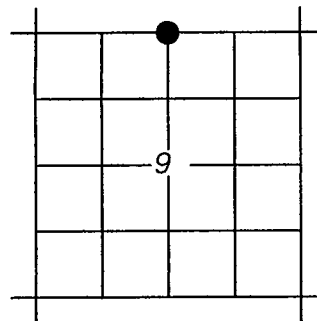

ORIGINAL G.L.O. DESCRIPTION: Set stone 14x10x6 in mound of stone for $\frac{1}{4}$ sec. cor.

2003 SURVEY BY JACK L. WATSON, PLS 7/15/2003.

No evidence of the original corner was found. I accept the intersection of fences running east and north as the best available evidence of corner position. These fences have been in place for many years and have recently been re-built in their historic locations. A fence running west is 8 ft. south and appears to be a much newer fence line. At the intersection of old fence lines running north and east I set a 2 $\frac{1}{2}$ "x30" aluminum pipe with attached 3 $\frac{1}{2}$ " aluminum cap, 30 inches in the ground. The cap is stamped as shown in the diagram. From which:

A 6" Juniper bears S.23°W., 23.7 feet, marked $\frac{1}{4}$ S9BT.

A 24" Juniper bears S.65°E., 24.5 feet, marked $\frac{1}{4}$ S9BT.

A 5/8"x30" iron pin bears N.23°E., 26.94 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears N.65°W., 21.17 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18°E. declination.

EVIDENCE FOUND: Found 2 $\frac{1}{2}$ " aluminum pipe with 3 $\frac{1}{2}$ " aluminum cap set flush with ground. Found Watson's reference points at record positions with red plastic caps attached. SE BT (now 27" diam.) bears S.65°E., with scribing visible in partially healed upper and lower blazes, and no BT tag. SW BT (now 8" diam.) bears S.23°W., with scribing visible in partially healed upper and lower blazes, and no BT tag.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

Monument is approximately 7' N of fence corner for North, East, and West fencelines and 1' North of gate post. Set location BT tag on fence corner of fences running North, East, and West.


STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 264,149.2 ft.

Easting: 8,657,244.1 ft.

Ellip. Ht: 4,189.7 ft.

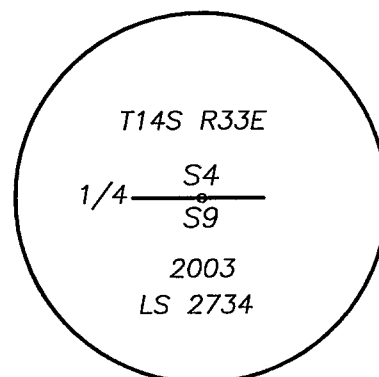


RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician
217 N. Canyon Blvd.
John Day, OR, 97845

Surveyed November 30, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 8 2015

BY: 



EXPIRES: 6/30/2016