



CERTIFIED RECORD OF LAND CORNER MONUMENTATION
CW1/16 Section 7, T14S, R33E, W.M.

History of original corner establishment:
NONE

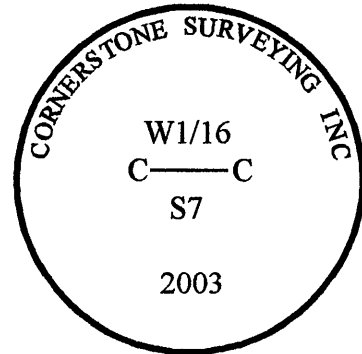

Description of corner evidence found:
NONE

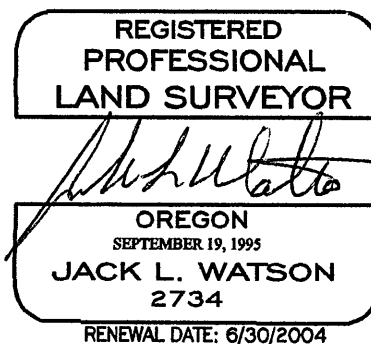

See Record Map of Survey No. 1672

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8"x30" iron pin with attached 2" aluminum cap, driven 28 inches in the ground. The cap is stamped as shown in the diagram.

From which:

A 14" P. Pine bears S39°W, 16.7 feet, marked CW1/16S7BT.

A 8" P. Pine bears N21°W, 12.9 feet, marked CW1/16S7BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: Aug. 1, 2003

Office of Surveyor County of Groot
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 1st day of Aug, 2003.
Robert O. Bandy by _____
(COUNTY OFFICIAL) (DEPUTY)