

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 357, dated July 2, 1880.

Surveyor General Record States: Set stone 12x10x8 in mound of stone for 1/4 corner. From which:

A Juniper 10" diam. bears S25°E, 20 lks dist.

A Pine 14" diam. bears N40°W, 60 lks dist.

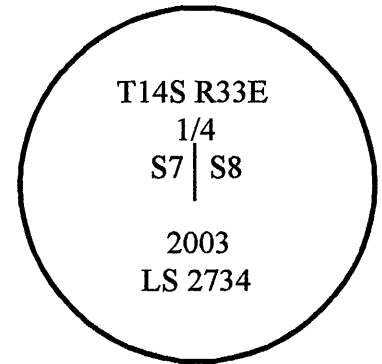


Description of corner evidence found:

Found stone 13x10x6 inches, no marks visible, lying in the center of a mound of stone.

From which:

A 16" Juniper bears S39°E, 12.0 ft., visible scribing in an open blaze.

A 22" P. Pine bears N46°W, 37.0 ft., the I did not open the grown over blaze.

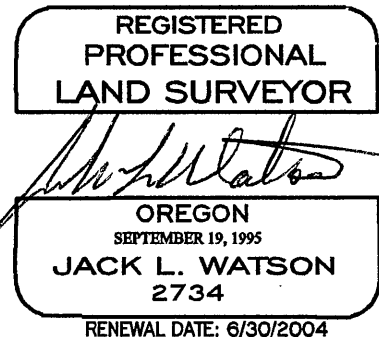

See Record Map of Survey No. 1672

Description of monument and accessories set at corner location:

I accept the center of the mound of stone for the corner position. I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, placed the original corner stone north alongside the pipe, built a mound of stone around pipe. The cap is stamped as shown in the diagram.

From which I scribe new BT's:

A 10" Juniper bears N14°E, 27.7 feet, marked 1/4S8BT.

A 13" Juniper bears S85°W, 27.3 feet, marked 1/4S7BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the new BT's and magnetic compass, with 18° E. declination.

Date: July 10, 2003

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 10 day of July, 2003.
Robert L. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)