



CERTIFIED RECORD OF LAND CORNER MONUMENTATION  
W1/16 Section 7, T14S, R33E, W.M.

History of original corner establishment:  
NONE

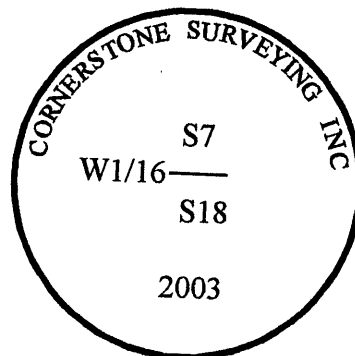

Description of corner evidence found:  
NONE

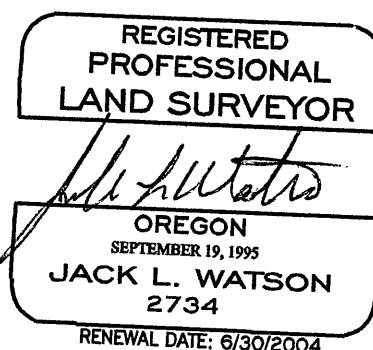

See Record Map of Survey No. 1672

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8"x30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground. The cap is stamped as shown in the diagram.

From which:

A 10" Fir bears N36°E, 22.4 feet, marked W1/16S7BT.

A 8" P. Pine bears S34°E, 17.2 feet, marked W1/16S18BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: Aug. 1, 2003

Office of Surveyor County of Grant  
State of Oregon I hereby certify that the within instrument was filed in this office  
for record on the 8 day of Aug, 2003.  
Deputy by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)