


CERTIFIED RECORD OF LAND CORNER MONUMENTATION



History of original corner establishment:

The original corner was set by Bamford Robb in 1880 under GLO
Joint Contract #357 dated July 2, 1880 and approved March 23, 1881.
80.00 Set basalt stone 24x14x5 inches from which;

A Pine 30" diameter bears S50°E 50 links distance.

Description of corner evidence found:

I found a 30" Ponderosa Pine snag scribed "S17 T14 R33 BT" rest grown over on a round face with no toe scar. The tree faces to the northeast. The original call was S50°E which would make the bearing tree face northwest but the tree is northeast facing. For the tree to be the southeast BT it would be in section 16 but it is scribed S17. Northeasterly of the tree's face at record distance is a scattered mound of stone with several stones of call size with one having 2 possible marks. I accept the tree as a SW bearing tree and accept the scattered mound of stone as evidence of the corner location. Therefore, I set the corner at N50°E 33.00 feet distance from the scribed tree.

I also found 2 unrecorded bearing trees that have Forest Service K-Tags. The trees are both snags and are in advanced stages of decomposition. I could find no reference to these trees anywhere in the record. They were not used by me to determine the corner position.

Description of monument and accessories I establish to perpetuate the original location of this corner:


Set a 3"X30" aluminum pipe with 3 1/2" aluminum cap 18" in ground and built a mound of stone around the corner. Cap marked as shown in DIAGRAM.

From which:

- A 3" Mahogany bears N53°54'E 24.69' scribed "X BT".
- A 5" Mahogany bears S21°25'E 33.94' scribed "T14S R33E S16 BT".
- A 6" Juniper bears S74°31'W 33.90' scribed "T14S R33E S17 BT".
- A 5" Mahogany bears N54°28'W 6.29' scribed "T14S R33E S8 BT".

Bearings and distances are based on a solar observation taken 1/2 mile east. Distances are to a 16d aluminum nail driven at root crown and perpendicular to the corner. Bearings are to the middle of the tree at the face. A Lieca 703 was used to turn bearings and shoot distances.

Witness: Shawn Parsons, James Smarr, Terry Holliday, and Willie Coleman
9/21/05

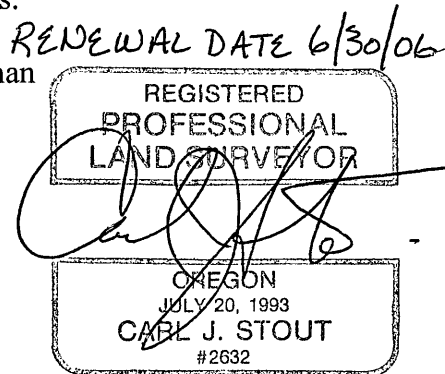

Office of County Surveyor, County of Grant, State of Oregon,
I hereby certify that the within instrument was filed in this office
For record on the 28 day of OCT, 2005.
Robert D. Smith by _____
(COUNTY OFFICIAL) (DEPUTY)