

RECORD OF LAND CORNER MONUMENTATION


CORNER: SW Cor. Sec. 10, Twp. 14S., R.33E., W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

SUBSEQUENT SURVEY: David E. Scott 1981, Grant County Map of Survey No. 726

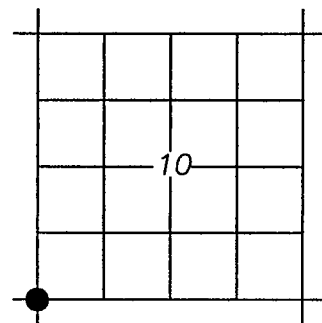

ORIGINAL G.L.O. DESCRIPTION: Set basalt stone 24x12x8 in a mound of stone for cor. to secs. 9-10-15 & 16. From which a fir 12 in. dia. bears S.45°E., 50 lks. dist. A pine 16 in. dia. bears S.10°W., 20 lks. dist.

1981 SURVEY BY DAVID E. SCOTT, PLS DATED 11/11/1981.

Found stone 24x12x8 (no marks) in a mound of rock on east-west fence. 24" PP S.43°W., 13.9 ft. scribed T14S R33E S16. At location of the stone I set 3/4" aluminum cap on 2 1/2"x30" aluminum pipe 12" above the ground. From which I marked new BT's: A juniper 8" dia. bears N.33°W., 42.2 ft. scribed T14SR33ES9 BT. A juniper 5" dia. bears N.56°E., 14.1 ft. scribed T14SR33ES10 BT. A juniper 30" dia. bears S.10°E., 61.0 ft. scribed T14SR33ES15 BT. Bearings and distances to center of tree compass variance 20°. Brass LS 1844 disc in lower blaze.

EVIDENCE FOUND: Found a 2 1/2" galvanized iron pipe with attached 3/4" brass cap protruding 12" above ground in a mound of stone. A Juniper BT bears N.56°E., with brass LS disc marked 1844 in lower blaze—BT was severely burned in the 2015 Canyon Creek fire, and is dead and down. A Juniper BT in the southeast quadrants is still standing, but was almost completely consumed by the fire. The center of the trunk is burned out and only fragments of sapwood remain. A P. Pine BT bears S.43°W., with burned out blaze—BT is severely burned and dead. A Juniper BT bears N.33°W., with brass LS disc marked 1844 in lower burned out blaze—BT is severely scorched and dead.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

Set orange fiberglass witness post next to mound of stone. Placed BT tag on SW Pine BT with 1981 record information.

FROM WHICH, I set the following reference points:


A 5/8" x 30" iron pin, bears N.44°55'E., 14.87 ft., with attached Green Plastic Cap marked GCS RP.

A 5/8" x 30" iron pin, bears S.43°28'E., 17.16 ft., with attached Green Plastic Cap marked GCS RP.

A 5/8" x 30" iron pin, bears S.61°00'W., 24.89 ft., with attached Green Plastic Cap marked GCS RP.

A 5/8" x 15" iron pin, driven to bedrock, bears N.72°35'W., 15.86 ft., with attached Green Plastic Cap marked GCS RP.

Used RTK GPS to measure RP's. Bearings to RP's are based on Geodetic North from a GPS observation taken at corner point.

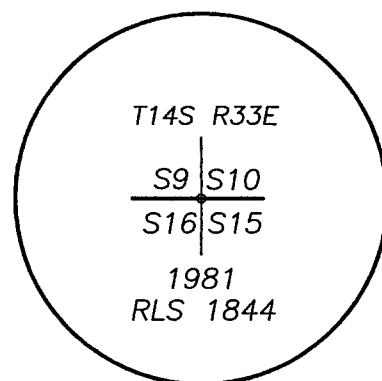

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 258,931.0 ft.

Easting: 8,660,029.9 ft.

Ellip. Ht: 4,894.5 ft.

RESTORATION BY:

Jason L. Hatfield, PLS
Deputy Grant County Surveyor
Marcus Teague, Technician
217 N. Canyon Blvd.
John Day, OR, 97845

Surveyed December 1, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 9 2015

BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
November 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2017