


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by B. Robb, contract 357, dated July 2, 1880.
North between sections 15 & 16, 80.00 chains, set
basalt stone 24x12x8 in a mound of stone for corner
to sections 9, 10, 15 & 16. From which:

- A Fir 12 in dia bears S45°E, 50 LKS dist
- A Pine 16 in dia bears S10°W, 20 LKS dist

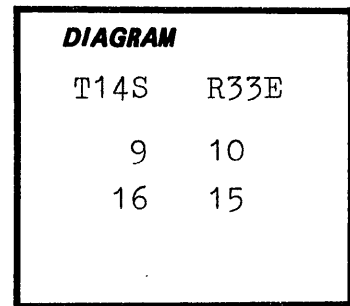

Description of corner evidence found:

Found stone 24x12x8 (no marks) in mound of rock on east-west fence.
24" PP S43°W, 13.9 ft. scribed T14S R33E S16


Description of monument and accessories I established to perpetuate the original location of this corner:

At location of stone I set 3 1/4" aluminum cap on 2 1/2" x 30" aluminum pipe 12" above ground.

From which I marked new BT's

- A juniper 8" dia. bears N33°W 42.2 ft. scribed T14SR33ES9 BT
- A juniper 5" dia. bears N56°E 14.1 ft. scribed T14SR33ES10 BT
- A juniper 30" dia. bears S10°E 61.0 ft. scribed T14SR33ES15 BT

Bearing and distances to center of tree compass variance 20°.
Brass LS 1844 disc in lower blaze.



I hereby certify the above corner monument was
re-established as herein described on November 11,
1981.



Office of...SURVEYOR..... County of...GRANT.....
State of..OREGON....., I hereby certify that the within instrument was filed in this office
for record of the...5... day of...April....., 1982.

(COUNTY OFFICIAL) by _____ (DEPUTY)