


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

NONE

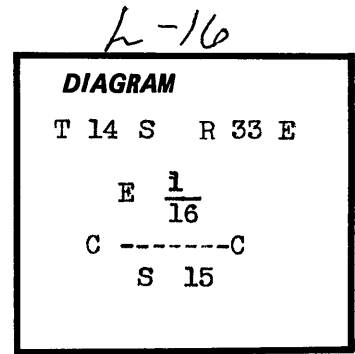

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Set a 3 inch aluminum cap on a 2 $\frac{1}{2}$ inch by 30 inch aluminum pipe, 5 inches above ground

Cap marked T14S R33E
 E 1/16
 C-----C
 S 15
 1982
 RLS 1844

From which:

A pine 6 inches in diam bears S 15⁰E 19.53 feet dist marked (CE $\frac{1}{16}$ S 15) (BT)
 A pine 6 inches in diam bears N 33⁰E 23.55 feet dist marked (CE 1/16 S 15) (BT)

bearing and distance to center of tree, brass LS 1844 washer in lower blaze

I here-by certify the above monument was established as herein described on June 17, 1982



See CS 726

Office of.....SURVEYOR..... County of.....GRANT.....
 State of.....OREGON....., I hereby certify that the within instrument was filed in this office
 for record on the...2... day of...Sept... , 1982...
Robert D. Sargent by
 (COUNTY OFFICIAL) (DEPUTY)