


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

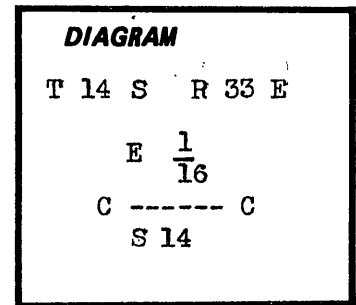

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3 inch aluminum cap on $2\frac{1}{2}$ X 30 inch aluminum pipe, 18 inches above ground in mound of earth and rock 4.0 X 1.5 feet, CAP marked



T14S R33E
E $\frac{1}{16}$
C --- C
S 14
1982
RLS 1844

From which :

A Juniper 6 inches diam. bears N 38° W, 36.8 feet dist., marked (CE $\frac{1}{16}$ S14) (BT)
A Pine 12 inches diam. bears S 25° W, 7.0 feet dist., marked (CE $\frac{1}{16}$ S14) (BT)

Bearing and distance to center of tree, Brass LS 1844 washer in lower blaze

I her-by certify the above monument was established as herin described on June 18, 1982



See CS 726

Office of.....SURVEYOR..... County of.....GRANT.....
State of.....OREGON....., I hereby certify that the within instrument was filed in this office
for record on the.....25 day of.....Sept....., 1982.....
Robert E. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)