


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by B. Robb, contract 357 dated July 2, 1880
Notes read, East on true line between secs 16 & 21
80.00 Set basalt stone 16x12x5 with a mound of stone
for cor to secs 15-16 21&22 frgm which
a juniper 2 ft. dba bears S 48 E 30 lks dist

RETRACEMENT BY G.F.RIGBY: Dependent resurvey instructions
dated March 19, 1938, group 216 notes read;
79.96 Proportionate measurement
Set an iron post; 3 ft. long 2 ins diam 28 ins in the ground for the cor of secs 15 and 16
with brass cap marked
T 14 S R 33 E
16 15
21
1939



Description of corner evidence found: From which
A pine, 22 ins diam bears N 69°15'E 154 lks dist mkd T14SR33ES15 BT
A juniper 22 ins diam, bears N26°00'W, 90 lks dist
mkd T14S R33E S 16 BT

2 1/2 inch brass cap on 2 inch iron post Marked
40 inch juniper N 26°W 59.4 feet with healed blaze

T 14 S R 33 E
S 16 S 15
S 21
1939

Description of monument and accessories | established to perpetuate the original location of this corner:


From the Brass Cap

A Juniper 12 in dia Bears N 56° E 98.2 feet
mkd T 14 S R 33 E S 15 BT

Bearing and distance to center of tree
20° compass variation
Brass disc in lower blaze mkd LS 1844

I here-by certify the above corner was re-established as herein
described on November 23. 1981

See CS 726

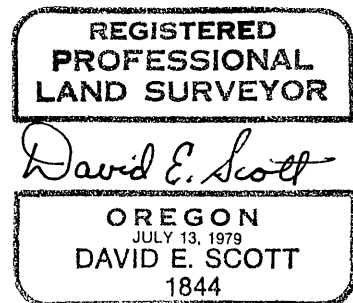

Office of.....SURVEYOR..... County of.....GRANT.....
State of.....OREGON....., I hereby certify that the within instrument was filed in this office
for record on the...2... day of...Sept... 1982
Robert A. Sargent by
(COUNTY OFFICIAL) (DEPUTY)