

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Set by S. Lackland, Contract 357, July 2, 1880.
East on true line between 18 & 19 40.00 chains
set stone 16 x 8 x 16 for $\frac{1}{4}$ section corner from
which:

A Pine 16 ins dia. bears $N85^{\circ}W$ 40 LKS DIST

A Pine 30 ins dia. bears $S2^{\circ}E$ 38 LKS DIST

Retraced by H. Angell, Contract 726, September 27, 1906.

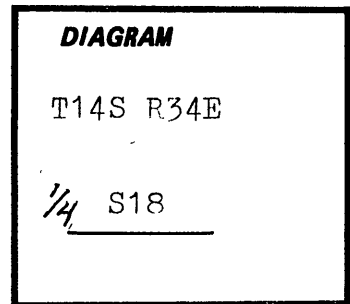


Description of corner evidence found:

Stone 14 x 10 x 6 marked $\frac{1}{4}$

24" PP $N85^{\circ}W$, 26.9 ft., 26.4 to face, marked $\frac{1}{4}S$ BT

Description of monument and accessories I established to perpetuate the original location of this corner:

At location on stone I set a $3\frac{1}{4}$ " aluminum cap on a $2\frac{1}{4}$ " x 30" aluminum pipe 20" above ground in mound 4.0' x 1.6' marked
From which I scribed a 6" PP which bears $N22^{\circ}E$, 19.8 ft. distance
marked $\frac{1}{4}S$ 18 BT Distance and bearing to center of tree with 20°
variance. Brass LS 1844 disc in lower blazes.



I hereby certify the above corner monument was
re-established as herein described on November 3,
1981.



Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 5 day of April, 1982..
..... by
(COUNTY OFFICIAL) (DEPUTY)