


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner set by S. W. Lackland under G.L.O. contract number 357 dated July 2, 1880.

Original notes:

- 40.00 Set stone 20x12x8 in. mound of stone for $\frac{1}{4}$ sec. cor. from which
 a pine 10 in. diam. bears N 85° W 36 lks. dist.
 a pine 28 in. diam. bears S 86° W 30 lks. dist.

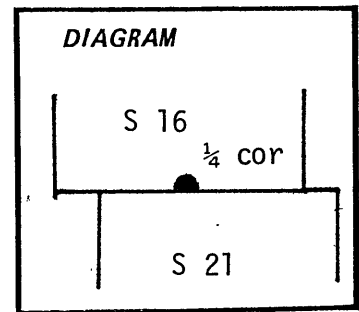

Description of corner evidence found:

1. Found original B.T.'s as described with scribing visible on B.T. for section 16, scribing obliterated for Sec. 21 B.T.
2. Found original stone which appeared to be considerably displaced down slope on top of ground. Undecayed organic material was found under stone further indicating displacement.

Description of monument and accessories I established to perpetuate the original location of this corner:

I set at record distance from bearing trees a $2\frac{1}{2}$ " x 30" Alum. pipe with cap marked as shown in mound of stone and earth, bearings did not align, from which

an original B.T. was 28" now 37" P. Pine bears S 72° W 19.8' from face of B.T.


an original B.T. was 10" P. Pine now 10" P. Pine bears N 85° W 23.8' from face of B.T.

I used compass with 20° East variation and steel tape. Corner was set approx. 2' South of fence line. The corner remonumented July 1981 by T. Scherner and L. Louthan.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Thomas D. Scherner

OREGON
JULY 14, 1978
-THOMAS D. SCHERNER
1657

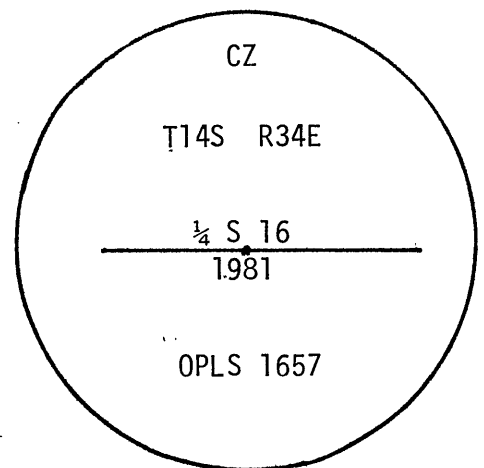

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 26 day of Nov, 1981
Robert D. Baggett (COUNTY OFFICIAL) Thomas D. Scherner (DEPUTY)