

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner set by S. W. Lackland under G.L.O. contract number 357 dated July 2, 1880.

Original notes:

- 80.00 Set stone 16x12x8 for cor. to sec. 15-16-21-22 from which
- a pine 26 in. diam. bears S 7⁰ E 13 lks. dist.
 - a pine 30 in. diam. bears S 6⁰ W 30 lks. dist.
 - a pine 24 in. diam. bears N 8⁰ W 10 lks. dist.
 - a pine 10 in. diam. bears N 70⁰ E 88 lks. dist.

Note: Corner is now corner to sec. 15 & 16 only.

Description of corner evidence found:

1. 26" pine S 7⁰ W blaze visible but scribing obliterated now an old stump.
2. 30" pine S 6⁰ W found evidence of old blaze with scribing visible.
3. 24" pine N 8⁰ W evidence of blazes with fencing wrapped around tree, used as fence corner.
4. 10" pine N 70⁰ E now a stump found part of blaze with B.T. scribed.
5. Did not find stone possibly due to logging or fence building activity nearby.

Description of monument and accessories I established to perpetuate the original location of this corner:



Set corner by intersecting all distances measured from the faces of B.T.'s. The bearings did not align. I set 2½" x 30" Alum. pipe with cap 30" in ground marked as shown from which

an original B.T. was 24" diam. now a 27" diam. P. Pine bears N 21⁰ W 7.3' to face of B.T.

a Pine 6" diam. bears N 46⁰ E 32.7' to face of B.T.

I used a compass with variation of 20⁰ East and steel tape. Corner is approx. 7' South of fence.

This corner remonumented July 1981 by T. Scherner and L. Louthan.

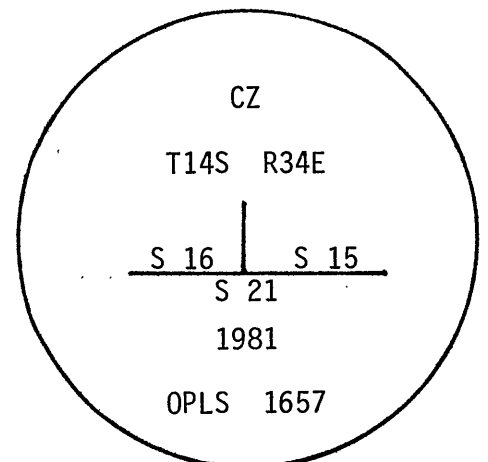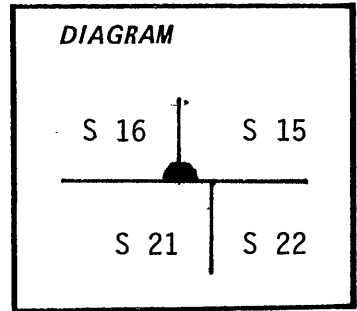

Office of Surveyor County of Grant
 State of Oregon hereby certify that the within instrument was filed in this office
 for record on the 16 day of Nov, 1981
Robert D. Segeth by _____
 (COUNTY OFFICIAL) (DEPUTY)