


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner set by S. W. Lackland under GLO contract number 357, dated July 2, 1880.

Original Notes:

40.00 Set stone 14x12x4 in mound of stone for $\frac{1}{4}$ sec. cor. from which
a pine 6 in. dia. bears S 20° W 120 lks. dist.
a pine 10 in. dia. bears N 10° E 48 lks. dist.

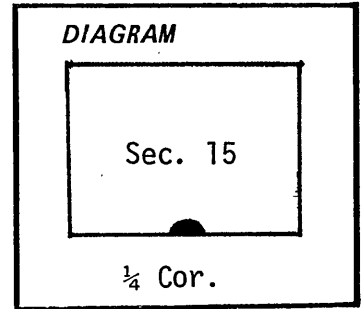

Description of corner evidence found:

1. Found original B.T. to Section 15. It is now a decayed uproot with scribing visible.
2. Found original B.T. to Section 22 with scribing obliterated.
3. Did not find stone but some indication of scattered stones about area (possible mound).

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Thomas D. Scherner

OREGON
JULY 14, 1978
THOMAS D. SCHERNER
1657


Description of monument and accessories established to perpetuate the original location of this corner:

I set $2\frac{1}{2}$ " x 30" Alum. pipe with cap in mound of stone and earth at intersection of record distances (bearings did not intersect), with Alum. cap as shown from which

a pine 8" in dia. bears N 11° W 43.1' from face of B.T. (new B.T.)
a pine 8" in dia. bears N 52° E 44.6' from face of B.T. (new B.T.)

From the pipe the original BT's bear S 16° W 79.2'
N 2° E 31.7'

I used compass with 20° East variation and steel tape. This corner remonumented July 1981 by T. Scherner and L. Louthan.

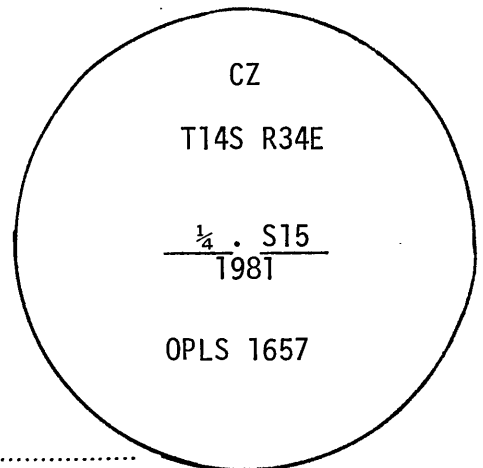

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Nov, 1981
Robert M. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)